



wa.me/919037117887
WhatsApp Business Account

brillalights.com

INDOOR lighting

Brilla Lights's indoor lighting series includes various lighting tools: Spotlight and wall washer, track and lighting structure, embedded lighting fixtures, ceiling and floor wash lights.

They all share a common design principle, which is efficient visual comfort.





GALAXY

GALAXY series adopts nano electroplating surface technology, with multiple installation methods including surface exposed installation and recessed installation.

The most distinctive feature is the stretchable version, which can be stretched up and down and adjust the light angle from 0- 90° .

CE CB TÜV CCC IP20 36V




CURVED SURFACE RING DESIGN

Curved surface ring design blends seamlessly with the ceiling.



CAN BE ADJUSTED

Smooth damping sensation allows for hovering at desired positions.

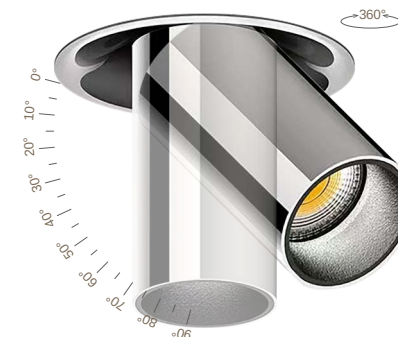

ROTATION AND TILT

Horizontal Rotation:360 °
Vertical Tilt: 0-90 °

GALAXY IN AD

- Horizontal Rotation: 360°
- Vertical Tilt: 0-90°



- 7W
Hole: Ø35mm
- 12W
Hole: Ø45mm

GALAXY ON AD

- Horizontal Rotation: 360°
- Vertical Tilt: 0-90°



- 7W
Hole: SURFACE
- 12W
Hole: SURFACE

GALAXY IN AD
FOCUS

- Horizontal Rotation: 360°
- Vertical Tilt: 0-90°
- Adjustable(Up and Down)



- 7W
Hole: Ø55mm
- 12W
Hole: Ø75mm

GALAXY ON

- 7W
Hole: SURFACE
- 12W
Hole: SURFACE



GALAXY S IN AD FOCUS




GALAXY M IN AD FOCUS



MODEL: SP114-R
SP114-R/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 574Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø62*h102mm
CUT OUT: Ø55mm



MODEL: SP115-R
SP115-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 981Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø82*h102mm
CUT OUT: Ø75mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity

GALAXY S IN AD



MODEL: SP112-R
SP112-R/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 574Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø32*h90mm
CUT OUT: Ø35mm



GALAXY M IN AD



MODEL: SP113-R
SP113-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 981Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø42*h110mm
CUT OUT: Ø45mm



GALAXY S ON AD



MODEL: SF201-M
SF201-M/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 574Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø32*h90mm
CUT OUT: /

GALAXY M ON AD



MODEL: SF202-M
SF202-M/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 981Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø42*h110mm
CUT OUT: /



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity

GALAXY S ON AD



MODEL: SF203-M⁺
SF203-M/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 574Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø64*h67mm
CUT OUT: /



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort

GALAXY M ON AD



MODEL: SF204-M⁺
SF204-M/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 981Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø85*h87mm
CUT OUT: /



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



DRAGONFLY/S PRO
ST

DRAGONFLY/S PRO
XST



DRAGONFLY/S PRO
MT



DRAGONFLY/S PRO
XS



DRAGONFLY/S PRO
M




DRAGONFLY/S PRO
S

DRAGONFLY/S PRO

Lightweight and exquisite appearance,
hidden with high-energy dragonfly series boutique spotlights,
and a tall and elegant radiator with a simple appearance,
like a lively dragonfly dancing gracefully.
Small lamp body but with high power.


CE CB TUV CCC IP20 36V

0
10
20
30

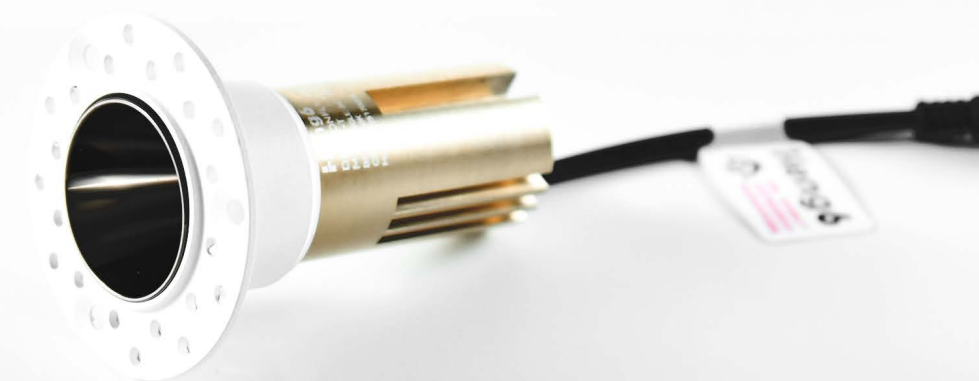

5W Power
Visible Diameter Of Only 35mm


**SMALL STATURE
HIGH POWER**



DRAGONFLY/S PRO

MODULAR design

- QUICK ASSEMBLY
- QUICK MAINTENANCE
- QUICK EXCHANGE COVER



DRAGONFLY/S PRO XS



MODEL: MN401-R
MN401-R/SR (S-River)
SYSTEM POWER: 5W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 455Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø40*h75mm
CUT OUT: Ø35mm



Ø35mm



DIMMING

DRAGONFLY/S PRO XS T



MODEL: MN401-T
MN401-T/SR (S-River)
SYSTEM POWER: 5W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 455Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø54*h75mm
CUT OUT: Ø35mm



Ø35mm

DRAGONFLY/S PRO S



MODEL: MN402-R
MN402-R/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 631Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø50*h76mm
CUT OUT: Ø45mm



Ø45mm



DIMMING

DRAGONFLY/S PRO S T



MODEL: MN402-T
MN402-T/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 631Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø63*h76mm
CUT OUT: Ø45mm



Ø45mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort

DRAGONFLY/S PRO M



MODEL: MN403-R
MN403-R/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 912.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø60*h80mm
CUT OUT: Ø55mm



DRAGONFLY/S PRO M T



MODEL: MN403-T
MN403-T/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 912.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø85*h80mm
CUT OUT: Ø55mm



Fixed



Certificate
mark



IP rating




Different light
colours



Excellent
thermal
management



Excellent
visual comfort

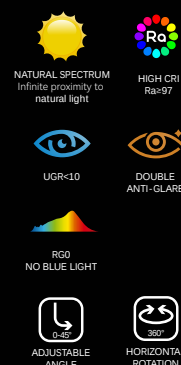


MOUNTAIN PRO

MOUNTAIN series micro hole light emitting technology, super anti glare,
cross light emitting, Wanxiang County floating
light structure.


CE CB TUV IP20 36V



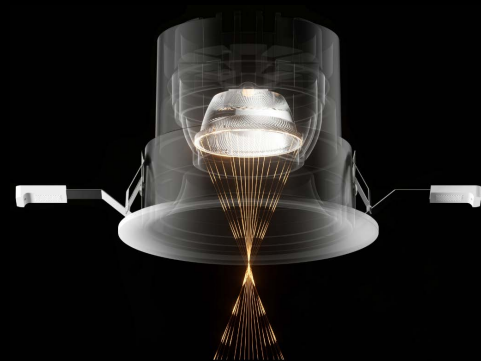

CROSS-LIGHTING DESIGN

Innovative cross-optics, where interwoven light beams sculpt the light and shadow within the space, and dual-track beams create a dynamic light curtain.

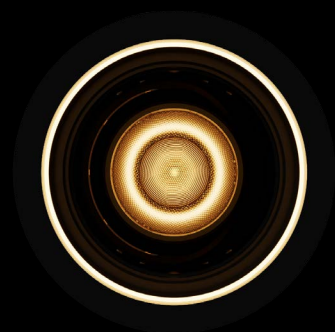

MULTI-LAYER ANTI-GLARE LENSES

A stratified prism design, which controls light in layers and can suppress stray light to reshape the light emission effect.



SUSPENDED STRUCTURE


Equipped with a floating lens structure that can rotate 360°, allowing for free control of light and shadow angles.



MOUNTAIN PRO



MODEL: SP407-R
SP407-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 24°/36°/55°
CCT: SINGLE COLOR 3000K, 3500K, 4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1141Lm
CRI: SINGLE COLOR Ra≥97,
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø82*H68mm
CUT OUT: Ø75mm



Adjustable



Certificate
mark



IP rating




Different light
colours



Excellent
thermal
management



Excellent
uniformity


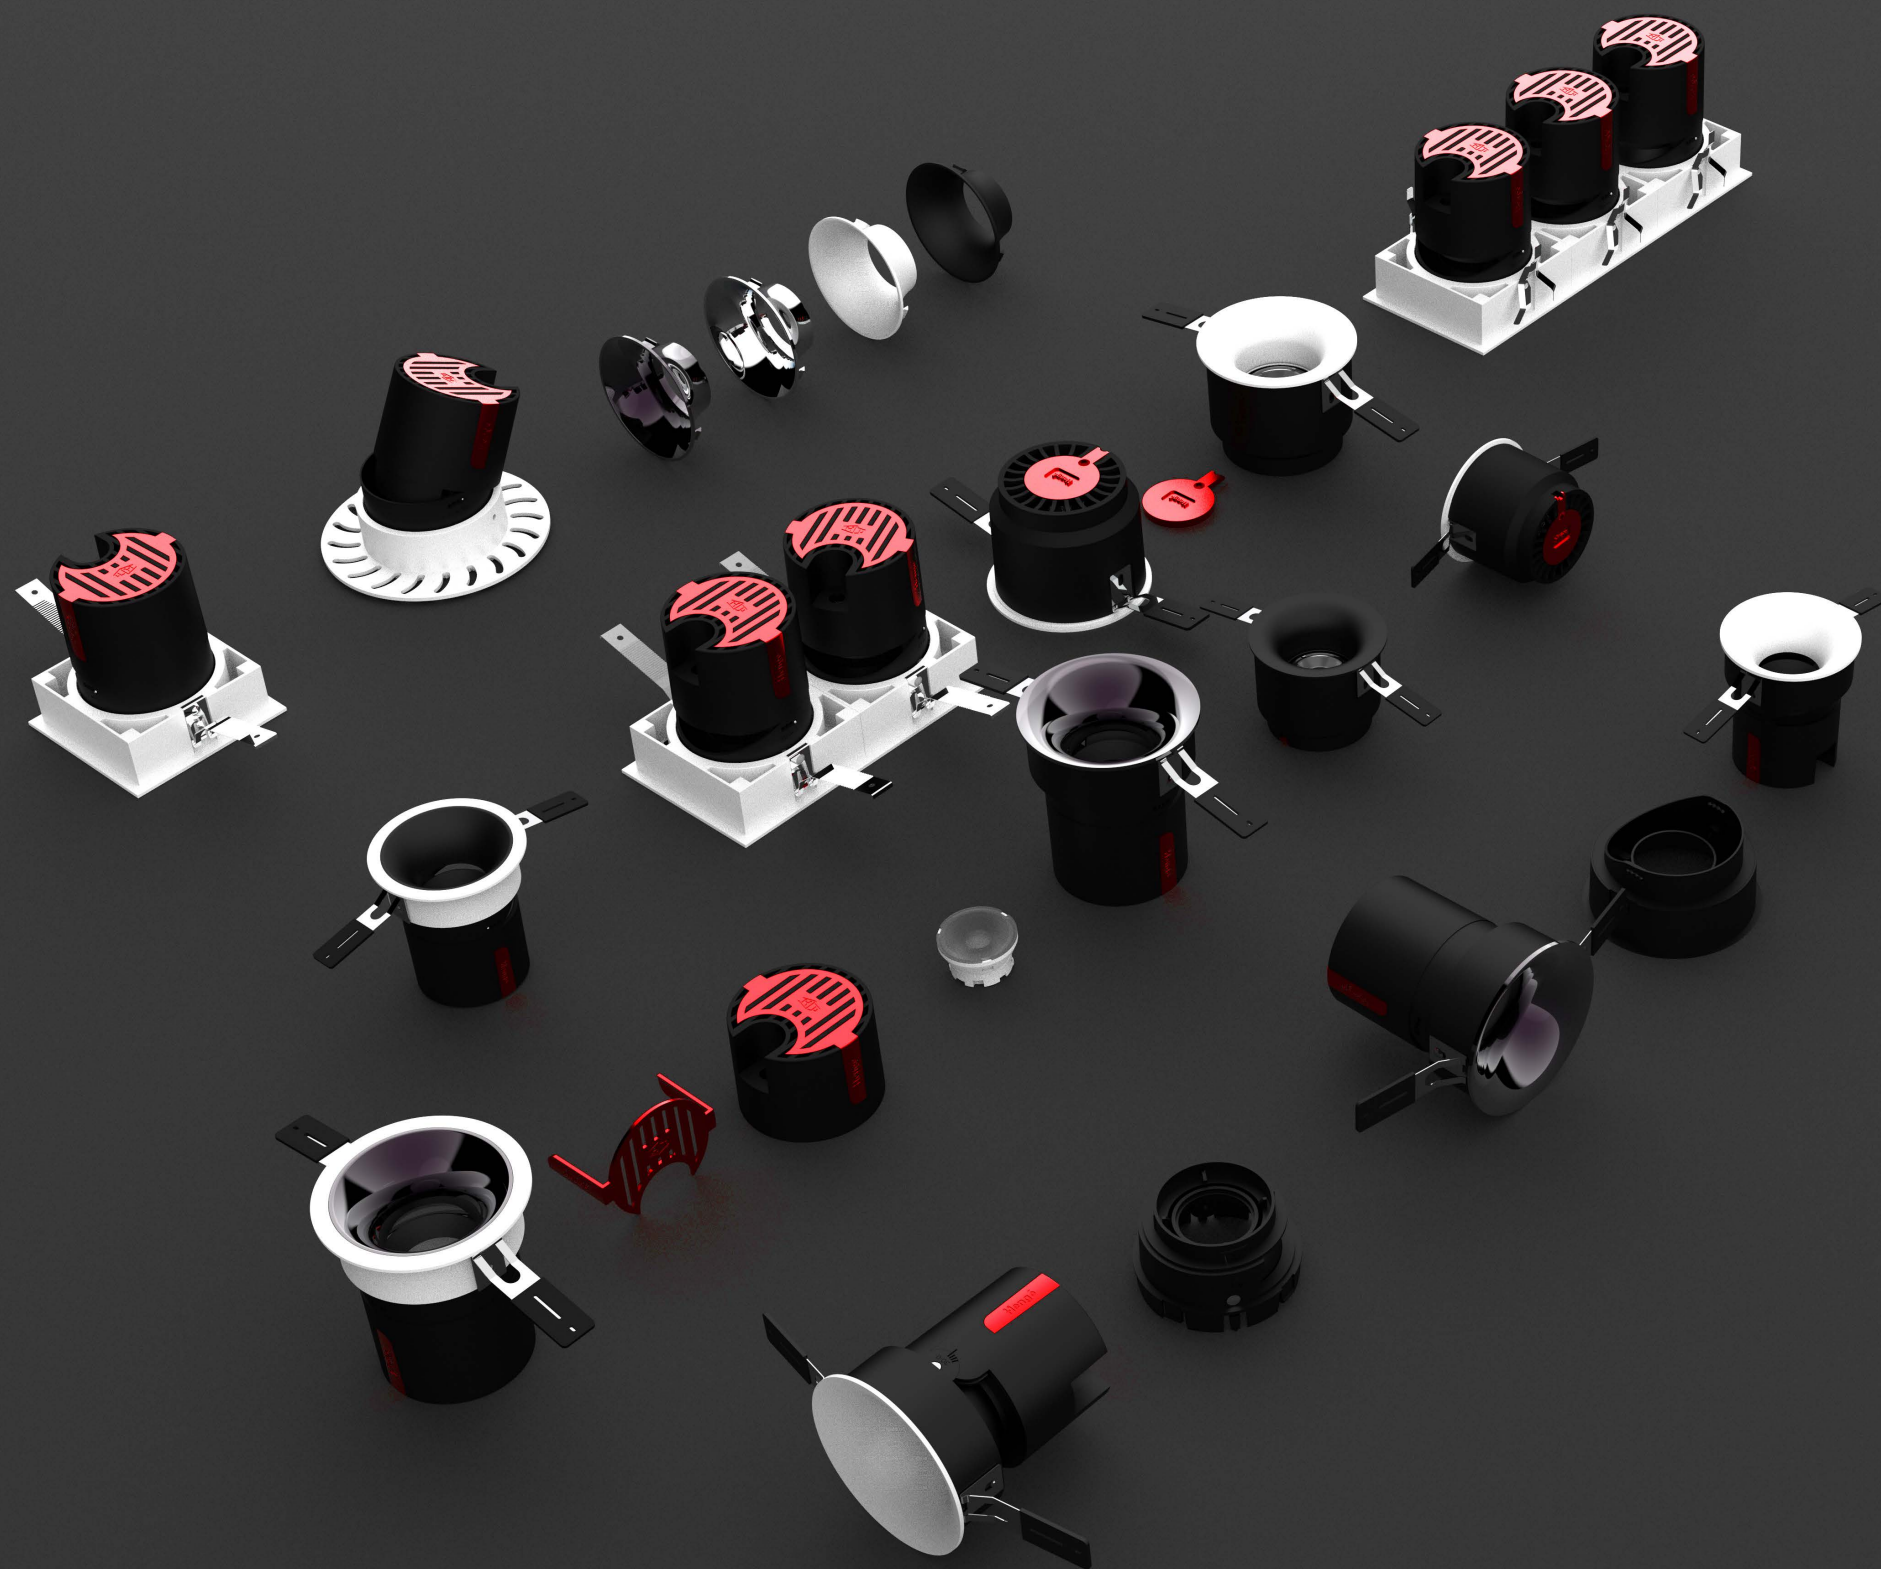


MINIMALIST

The MINIMALIST series family uses classic red and black color combinations throughout the series, with black representing mystery and solemnity as the main color, and adding red alloy material representing passion and stability.

The MINIMALIST series adopts high-end oxidation technology, which is durable and timeless.

The entire series comes in two categories: 7W, 10W, and 12W, which can be selected from simple spotlights. There are also mini spotlights available with a minimum opening of Ø 30mm.

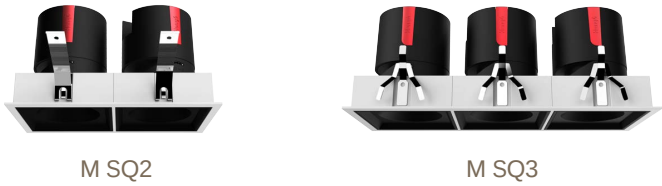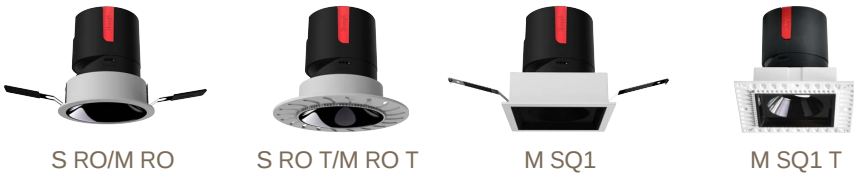

MINIMALIST/A
SPOTLIGHT



MINIMALIST/A



CE CB TÜV CCC IP20 36V

MODULE


Easy Disassemble | Easy Replace

The MINIMALIST A series features a curved reflector cup design and a quick-detach module structure.

The precise light control optical design allows for customization. Whether it's the bezel, optical lens, or reflector cup color, these components can be easily replaced according to the size of the objects to be illuminated in the home and the lighting needs of the space.

This flexibility helps achieve the desired lighting effects and improves the efficiency and outcome of our installation.

R9' | Ra 97

 SUNLIKE

The lighting fixture uses Korean Seoul Semiconductor's SUNLIKE chips, which offer strong light penetration capabilities. It is currently the only light source in the world that employs patented laser excitation technology.

The color rendering index (CRI) can reach above 97, truly reproducing the colors of objects and closely approximating natural light. It features a high red saturation level.

This type of lighting is currently recommended by hospitals for therapeutic use and is particularly suitable for preventing myopia in children as well as for the treatment of depression and Alzheimer's disease.

MAFFLY

Adhering to the traditional spotlight design, options include both recessed and pre-installed models with a complete range of cutout sizes.

Customization is available based on specific needs, including natural light spectrum, various power levels, single-color or dual-color configurations, and compatibility with different smart control systems.

Applications

A. Residential use for direct lighting (balconies, hallways) with a 36° beam angle.

B. Accent lighting (coffee tables, dining tables, plants) with a 24° beam angle.

C. Commercial use for any space.



MINIMALIST/A S RO



MODEL: SP201-R
SP201-R/SR (S-River)
SYSTEM POWER: 7W/10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 819.5Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: ~25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø63*h83mm
CUT OUT: Ø55mm



MINIMALIST/A S RO T



MODEL: SP202-T
SP202-T/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 819.5Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: ~25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø93*h83mm
CUT OUT: Ø55mm



MINIMALIST/A M RO



MODEL: SP203-R
SP203-R/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 982Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: ~25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø83*h88mm
CUT OUT: Ø75mm



MINIMALIST/A M RO T



MODEL: SP204-T
SP204-T/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 982Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: ~25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø110*h88mm
CUT OUT: Ø75mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity

MINIMALIST/A M SQ1



MODEL: SPQ205-R
SPQ205-R/SR (S-River)

SYSTEM POWER: 10W/12W
ANGLE: 15°/24°/36°

CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 982Lm



CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95

MOT: -25°~50°

SERVICE LIFE: 35000-50000h

LED: Sun like

SIZE: 83*83*h88mm
CUT OUT: 76*76mm



MINIMALIST/A M SQ1 T



MODEL: SPQ206-T
SPQ206-T/SR (S-River)

SYSTEM POWER: 10W/12W
ANGLE: 15°/24°/36°

CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 982Lm


CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95

MOT: -25°~50°

SERVICE LIFE: 35000-50000h

LED: Sun like

SIZE: 105*105*h88mm
CUT OUT: 76*76mm



MINIMALIST/A M SQ2



MODEL: SPQ207-R
SPQ207-R/SR (S-River)

SYSTEM POWER: 2*10W/12W
ANGLE: 15°/24°/36°

CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1965Lm



CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95

MOT: -25°~50°

SERVICE LIFE: 35000-50000h

LED: Sun like

SIZE: 158*83*h88mm
CUT OUT: 150*76mm



MINIMALIST/A M SQ3



MODEL: SPQ208-R
SPQ208-R/SR (S-River)

SYSTEM POWER: 3*10W/12W
ANGLE: 15°/24°/36°

CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 2946Lm


CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95

MOT: -25°~50°

SERVICE LIFE: 35000-50000h

LED: Sun like

SIZE: 233*83*h88mm
CUT OUT: 225*76mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity



FULL SPECTRUM
Infinite proximity to
natural light



HIGH CRI
Ra>97



UGR<10



DOUBLE
ANTI-GLARE



RG0
NO BLUE LIGHT



ADJUSTABLE
ANGLE



HORIZONTAL
ROTATION



MINIMALIST/C

Deep hidden light source,
visible light but invisible light dual anti glare optics.
The 0-30 degree scale can adjust the light output angle design,
ensuring precise and error free light output.
One piece aviation aluminum lamp body,
doubled heat dissipation capacity, master level appearance design,
classic Brilla red and black color matching,
exclusive logo nameplate,
collection like ultimate.


CE CB TÜV IP20 36V

127lm

Thanks to the chip and the
optical structure,
the brightness can reach
127lm/W.

The MINIMALIST C series focuses on
high luminous efficacy. The chip and
optical structure can perfectly achieve
high luminous efficacy. It can produce
127 lm with just 1W, and 10W can achieve
the illumination level of a conventional
15W lamp.

The recessed, borderless design
seamlessly integrates the lamp body
with the ceiling, creating a neat and
invisible appearance. This not only
reduces the budget cost for
homeowners but also saves energy and
electricity.

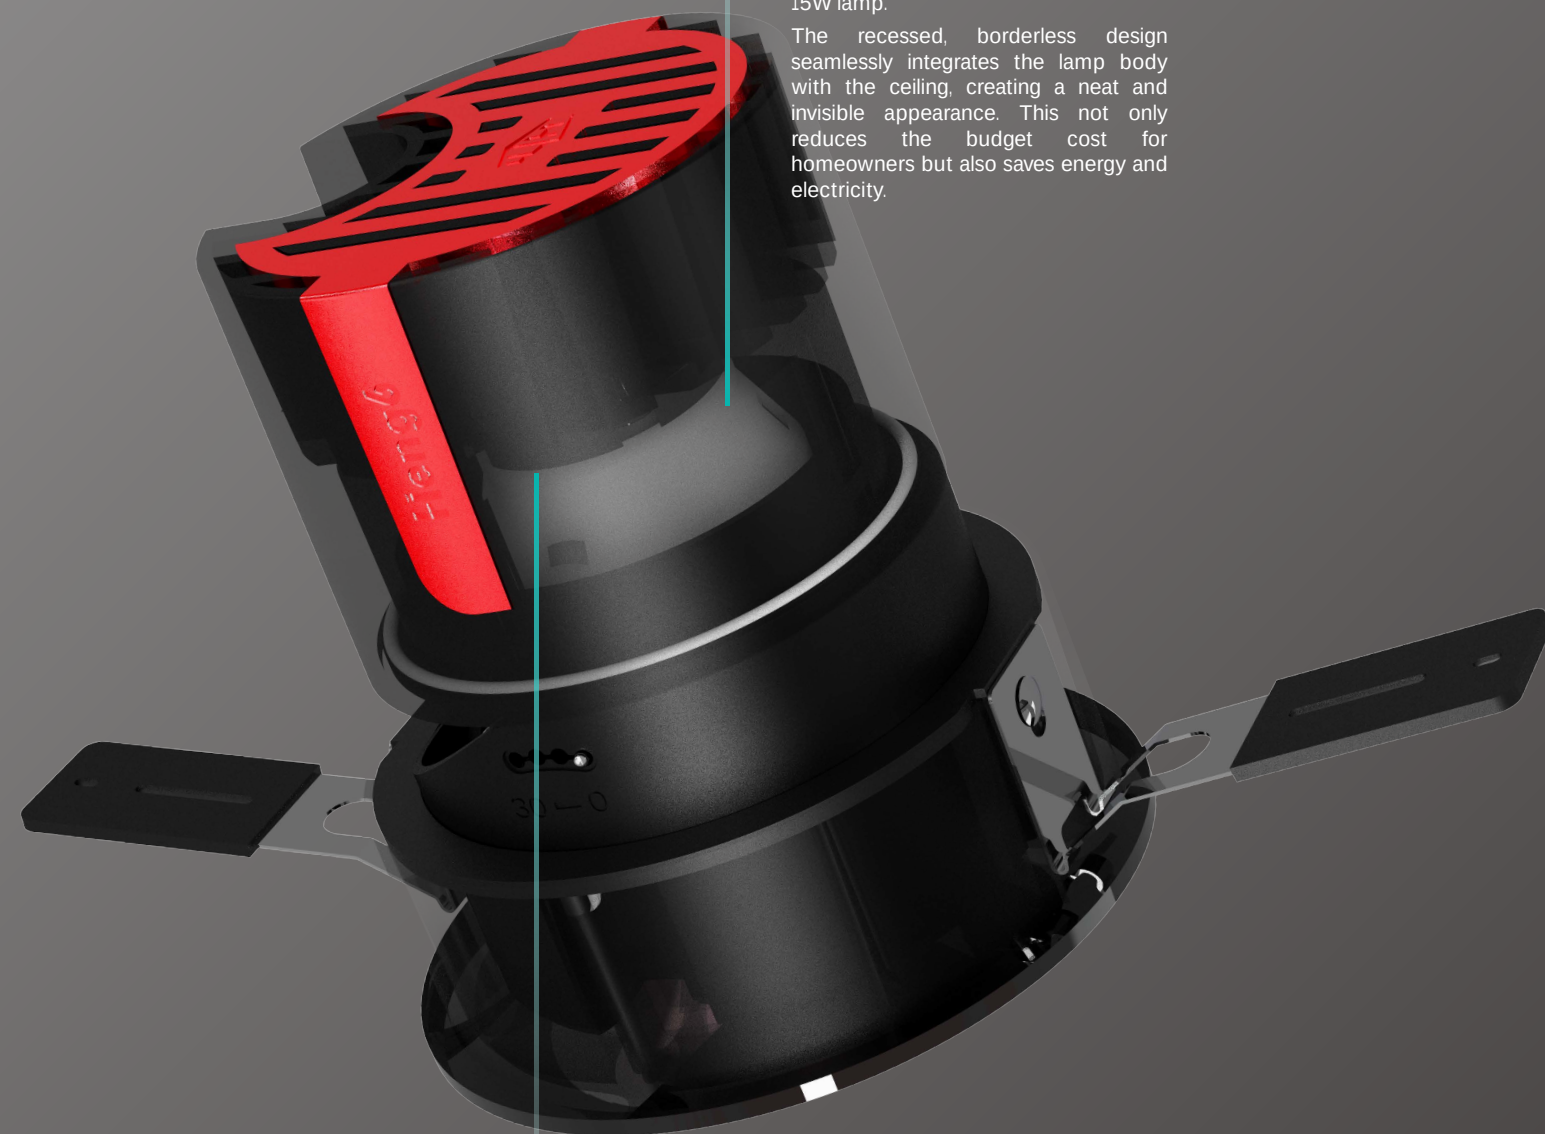

30%

Improved heat dissipation
capability.

GRADE A DIE-CAST ALUMINUM (high-density)

The entire lamp is made of metal materials.
The heat sink uses high-density Grade A die-cast
aluminum, which enhances the heat dissipation
system by 30% compared to ordinary die-cast
aluminum.
This prevents the lamp from experiencing light
degradation and extends its service life compared to
conventional products.

MODULE

Easy Disassemble | Easy Replace

The MINIMALIST C series features a curved reflector cup design and a quick-detach module structure.

The precise light control optical design allows for customization. Whether it's the bezel, optical lens, or reflector cup color, these components can be easily replaced according to the size of the objects to be illuminated in the home and the lighting needs of the space.

This flexibility helps achieve the desired lighting effects and improves the efficiency and outcome of our installation.



Curved reflective cup design

R9⁺ | Ra 97

SUNLIKE

The lighting fixture uses Korean Seoul Semiconductor's SUNLIKE chips, which offer strong light penetration capabilities. It is currently the only light source in the world that employs patented laser excitation technology.

The color rendering index (CRI) can reach above 97, truly reproducing the colors of objects and closely approximating natural light. It features a high red saturation level.

This type of lighting is currently recommended by hospitals for therapeutic use and is particularly suitable for preventing myopia in children as well as for the treatment of depression and Alzheimer's disease.

MAFFLY

The ultra-narrow frame features a die-cast aluminum front ring that can be easily replaced in various colors.

This product is specifically developed for the designer channel and has high requirements for on-site construction. It can be customized according to specific needs, including high light efficiency, different power levels, single-color or dual-color options, and compatibility with various smart control systems.

Applications

- A. Residential use for direct lighting (balconies, hallways) with a 36° beam angle.
- B. Accent lighting (coffee tables, dining tables, plants) with a 24° beam angle.
- C. Commercial use for any space.

MINIMALIST/C S



MODEL: SP209-R
SP209-R/SR (S-River)
SYSTEM POWER: 7W/10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 819.5Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø60*h83mm
CUT OUT: Ø55mm



MINIMALIST/C M



MODEL: SP202-T
SP202-T/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 990.5Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø80*h83mm
CUT OUT: Ø75mm



Adjustable



Certificate mark



IP rating



Different light colours



Excellent thermal management



Excellent uniformity



MINIMALIST/R



CE CB TÜV IP20 36V

127[↑]lm

Thanks to the chip and the optical structure, the brightness can reach 127lm/W.

The MINIMALIST R series focuses on high luminous efficacy. The chip and optical structure can perfectly achieve high luminous efficacy. It can produce 127 lm with just 1W, and 10W can achieve the illumination level of a conventional 15W lamp.

The recessed, borderless design seamlessly integrates the lamp body with the ceiling, creating a neat and invisible appearance. This not only reduces the budget cost for homeowners but also saves energy and electricity.



30[↑]%

Improved heat dissipation capability.

GRADE A DIE-CAST ALUMINUM (high-density)

The radiator adopts high-density A-grade die cast aluminum, which is 30% higher than the heat dissipation system of general die cast aluminum.

The lighting fixtures are less prone to light decay and have a longer service life than conventional products.

MODULE

Easy Disassemble | Easy Replace

The MINIMALIST R series features a curved reflector cup design and a quick-detach module structure.

The precise light control optical design allows for customization. Whether it's the bezel, optical lens, or reflector cup color, these components can be easily replaced according to the size of the objects to be illuminated in the home and the lighting needs of the space.

This flexibility helps achieve the desired lighting effects and improves the efficiency and outcome of our installation.



Curved reflective cup design

R9⁺ | Ra 97

SUNLIKE

The lighting fixture uses Korean Seoul Semiconductor's SUNLIKE chips, which offer strong light penetration capabilities. It is currently the only light source in the world that employs patented laser excitation technology.

The color rendering index (CRI) can reach above 97, truly reproducing the colors of objects and closely approximating natural light. It features a high red saturation level.

This type of lighting is currently recommended by hospitals for therapeutic use and is particularly suitable for preventing myopia in children as well as for the treatment of depression and Alzheimer's disease.

MAFFLY

For high-end drainage models, the face ring is made of aluminum and can be changed in color freely.

The diameter of the face ring is 85mm, and the on-site drilling requirements do not need to be so high. High light efficiency and customization of different power, monochrome, dual color, and matching intelligent control systems can be carried out according to needs. (MINIMALIST R only has one size opening of 75mm)

Applications


A.home decoration uses direct lighting (balcony, hallway) with a beam angle of 36°

B.fixtures for any space, with a 24° beam angle for key lighting (coffee table, dining table, green plants).

MINIMALIST/R M



MODEL: SP217-R
SP217-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 990.5Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø83*h88mm
CUT OUT: Ø75mm



Adjustable



Certificate mark



IP rating



Different light colours



Excellent thermal management



Excellent uniformity



MINIMALIST/T

Ultra narrow border design,
narrower borders create a more beautiful appearance.
Double anti glare technology,
the light source is hidden deep to prevent glare and not dazzling,
combined with an integrated lamp body heat dissipation
structure that is beautiful and durable.


CE CB TÜV IP20 36V

127lm

Thanks to the chip and the
optical structure,
the brightness can reach
127lm/W.

The MINIMALIST R series focuses on
high luminous efficacy. The chip and
optical structure can perfectly achieve
high luminous efficacy. It can produce
127 lm with just 1W, and 10W can achieve
the illumination level of a conventional
15W lamp.

The recessed, borderless design
seamlessly integrates the lamp body
with the ceiling, creating a neat and
invisible appearance. This not only
reduces the budget cost for
homeowners but also saves energy and
electricity.

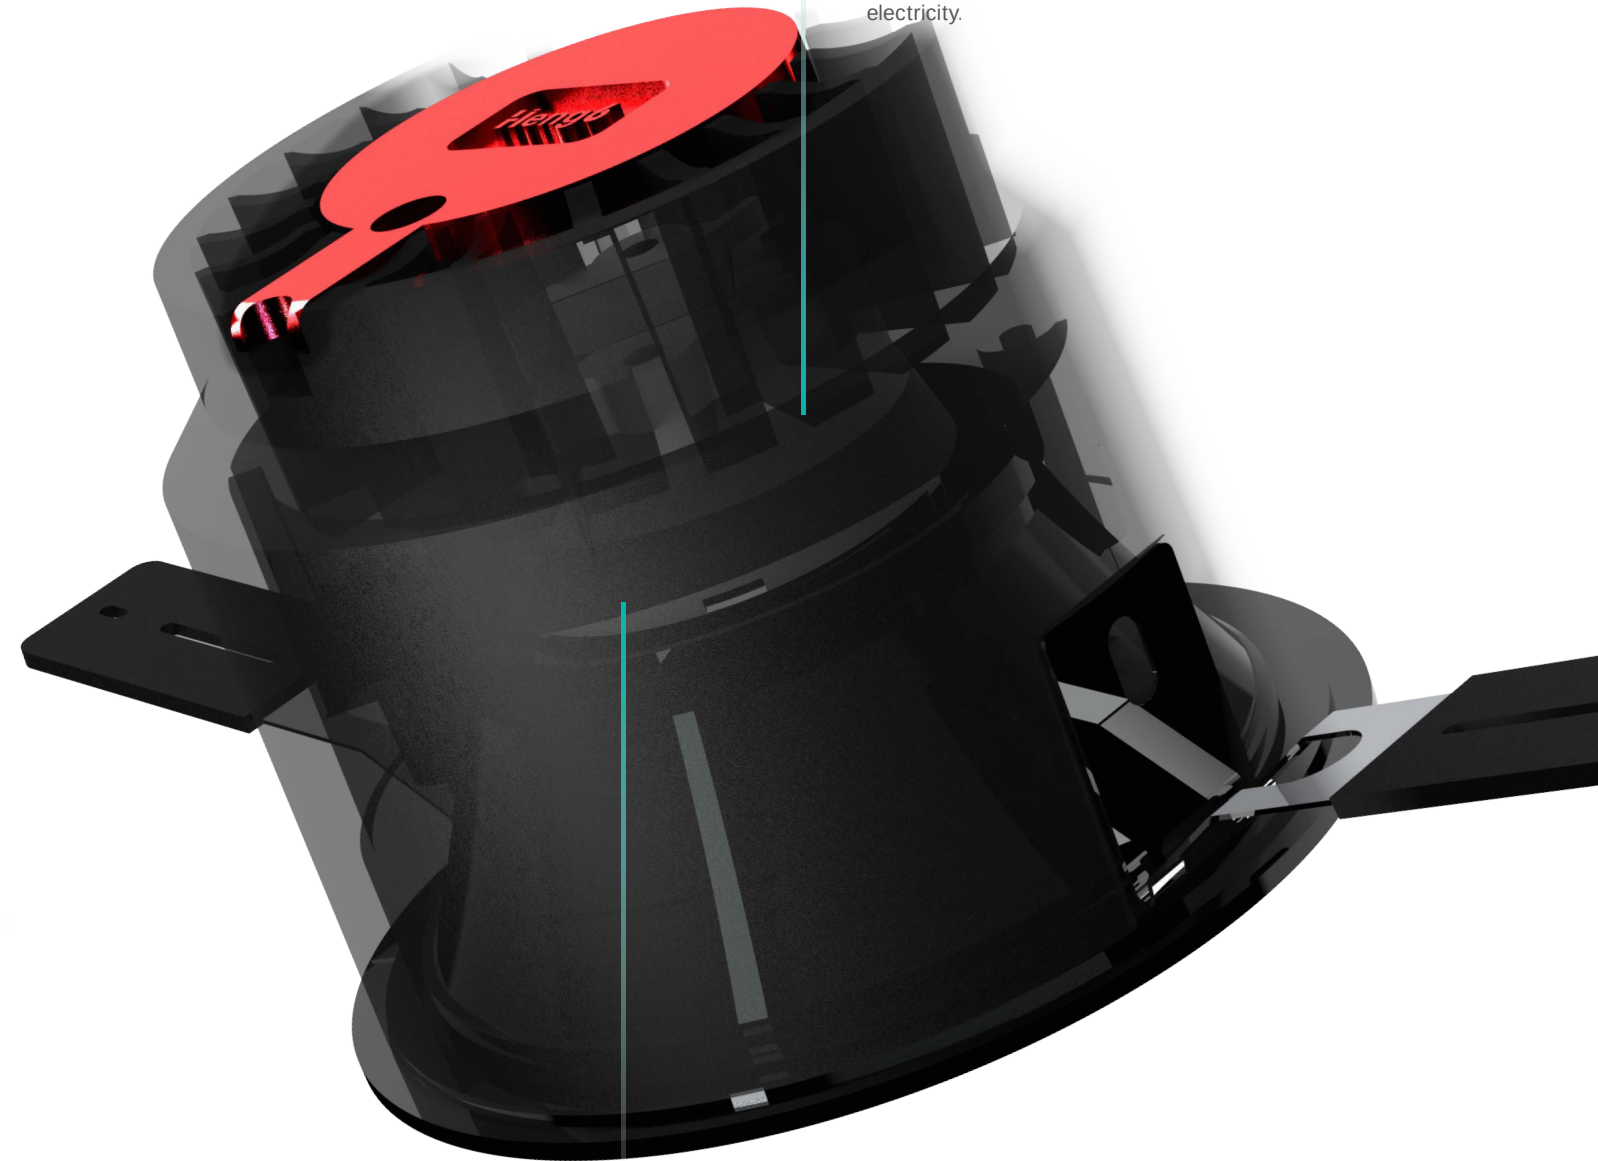

30%

Improved heat dissipation
capability.

GRADE A DIE-CAST
ALUMINUM
(high-density)

The radiator adopts high-density A-grade die cast
aluminum, which is 30% higher than the heat
dissipation system of general die cast aluminum.

The lighting fixtures are less prone to light decay and
have a longer service life than conventional products.

• INTEGRATION

MINIMALIST T series adopts a curved surface ring design and an integrated lighting structure achieving precise optical design for light control. Whether it's the surface ring, optical lens, or reflective cup color, we can achieve the desired lighting effect according to the size of the object being illuminated at home and the lighting requirements of the space, improving our lighting efficiency and effectiveness.



• Curved reflective cup design

R9⁺

Ra 97

SUNLIKE

The lighting fixture uses Korean Seoul Semiconductor's SUNLIKE chips, which offer strong light penetration capabilities. It is currently the only light source in the world that employs patented laser excitation technology.

The color rendering index (CRI) can reach above 97, truly reproducing the colors of objects and closely approximating natural light. It features a high red saturation level.

This type of lighting is currently recommended by hospitals for therapeutic use and is particularly suitable for preventing myopia in children as well as for the treatment of depression and Alzheimer's disease.

• MAFFLY

MINIMALIST T series, with extremely narrow borders and a car-aluminum surface ring that can be changed colors freely.

The optics of MINIMALIST T are different from those of spotlights, and the light spot of optical tube lights with the same beam angle will be larger. High light efficiency and customization of different power, monochrome, dual color, and matching intelligent control systems can be carried out according to needs.

Applications

- A. Home decoration with direct lighting (balcony, hallway) at a beam angle of 55°.
- B. Basic lighting for tooling.

MINIMALIST/T S



MODEL: SP211-R
SP211-R/SR (S-River)
SYSTEM POWER: 7W/10W
ANGLE: 36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 829Lm
CRI: SINGLE COLOR Ra≥97(Full Spectrum),
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø60*h52mm
CUT OUT: Ø55mm



MINIMALIST/T M



MODEL: MODEL: SP212-R
SP212-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 979.5Lm
CRI: SINGLE COLOR Ra≥98(Full Spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø80*h62mm
CUT OUT: Ø75mm



Fixed



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management



Excellent
visual comfort

MINIMALIST/S

Exquisite and beautiful,
with a slender body and exquisite craftsmanship.
The smallest opening is only Ø 30MM
Small stature, high power, up to 18W,
increased utilization rate by 75%.



CE CB TÜV CCC IP20 36V

MINIMALIST/S S




MODEL: SP218-R
SP218-R (S-River)
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 570Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø35*h84mm
CUT OUT: Ø30mm



MINIMALIST/S M



MODEL: SP219-R
SP219-R/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 819.5Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø45*h91mm
CUT OUT: Ø40mm



MINIMALIST/S L



MODEL: SP220-R 
SP220-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 989Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLORRa≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø55*h100mm
CUT OUT: Ø50mm



MINIMALIST/S XL



MODEL: SP221-R 
SP221-R/SR (S-River)
SYSTEM POWER: 18W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1485.5Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLORRa≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø65*h108mm
CUT OUT: Ø60mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management




Excellent
visual comfort

STUNNING III

Perfectly presenting natural colors of the environment, with museum level professional lighting effects. Nano level surface electroplating process, U-shaped heat dissipation channel efficiently improves heat dissipation rate.

The Jinghong 3.0 series has been upgraded to provide a whole house solution for home spaces with both interior and exterior repairs.

CE CB TÜV CCC IP20 S-River

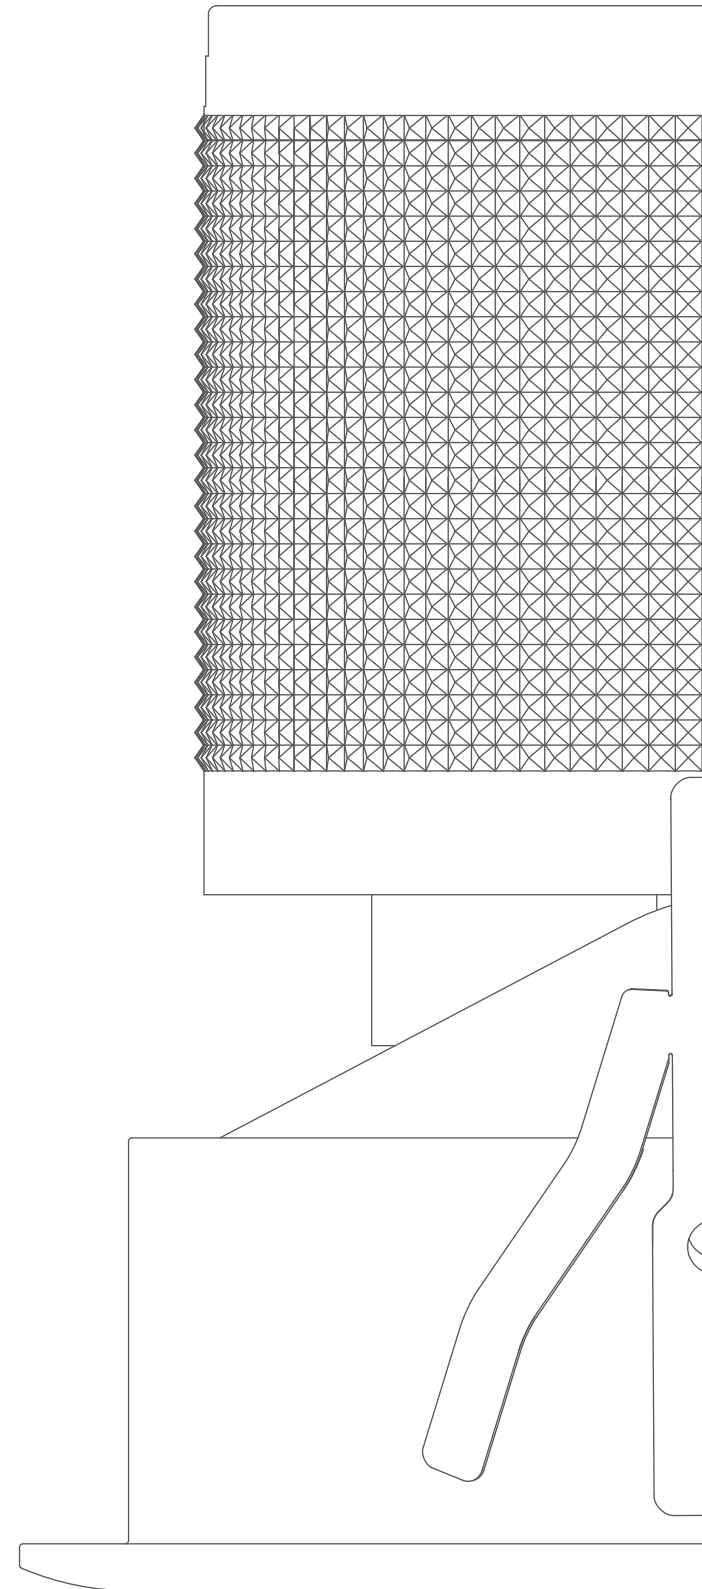

Home

STUNNING III



MODULE STRUCTURE | REPLACE AT WILL

The quick-detachable modular structure, combined with precise light control through optical design, allows for great flexibility.

Whether it's the bezel, optical lens, or the color of the reflector cup, these components can be easily replaced according to the size of the objects to be illuminated in your home and the specific lighting needs of the space.

This enables you to achieve the desired lighting effects, thereby enhancing both the efficiency and the overall outcome of your lighting setup.



R9' | CRI 99.7'



SUNLIKE

The lighting chip adopts SUNLIKE chip from Seoul, South Korea, with strong penetration power of light effect.

It is currently the only laser excitation patented technology light source in the world, with a color rendering index CRI of 99.7, which can truly restore the color of objects, close to natural light.

The red saturation is relatively high, and it is currently recommended by the hospital as a treatment level lighting level, especially suitable for preventing myopia, depression, and Alzheimer's disease in children.

PRODUCT APPLICABLE SCENARIOS

A can be used as basic lighting (for corridors and balconies) with a beam angle of 36°

B can be used for key lighting (coffee table, dining table, green plants) with a beam angle of 15°

C can be used for local lighting (for wall cleaning), with a beam angle of 36° applied 20 cm away from the wall


The SUNNING III series has a maximum power of 15W and can be customized with high luminous efficiency and different power, monochrome, dual color, and intelligent control systems according to needs.

40%
Improved heat dissipation capability.

COLD FORGED ALUMINUM (High density cold forging aluminum raw material)

The entire lamp body is made of all metal material, and the heat sink is made of the best aluminum profile in the industry, "cold forged aluminum".

Cold forged aluminum has high density, and the diamond grid texture design of the radiator improves the heat dissipation function by 40% on the original basis, making it less prone to light decay and extending the lifespan of the lamp.

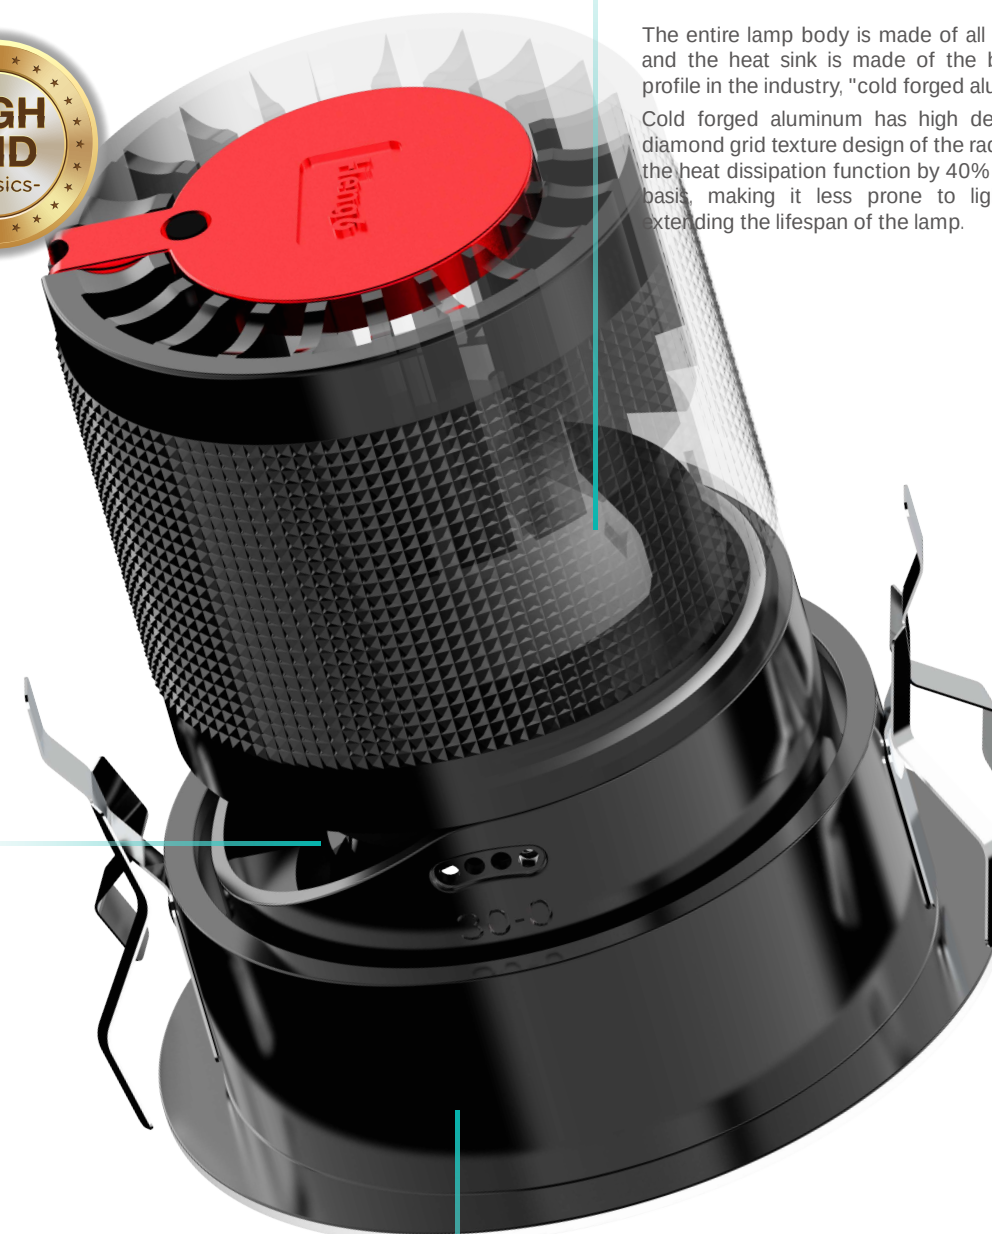

more.....


SALT SPRAY TEST/ NANOPLATING PROCESS

The entire lamp adopts the nanoplating process. Before plating, it undergoes a salt spray test. Only high-density materials can withstand the salt spray test.


After passing the salt spray test, the main advantages are reflected in the following aspects: it prevents oxidation and chlorination. While enhancing the appearance's refinement, it also increases the product's functionality and durability.

TECH'


Salt Spray Test + Nanoplating Process

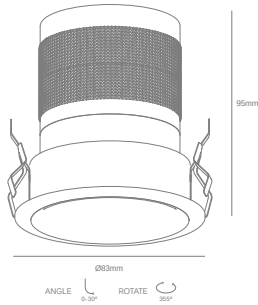

SP103-R / 12W

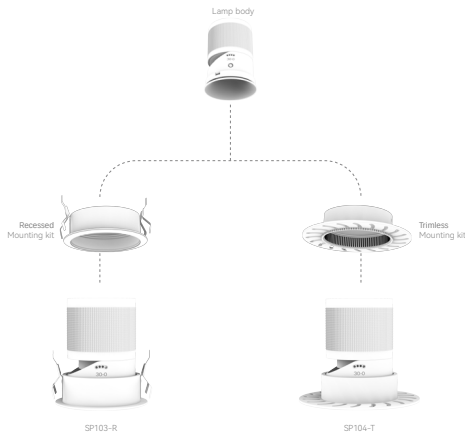


STUNNING III S RO



MODEL: SP101-R
SP101-R/SR (S River)
SYSTEM POWER: 7W/10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 813.3Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø63*h83mm
CUT OUT: Ø55mm



STUNNING III S RO T



MODEL: SP102-T
SP102-T/SR (S River)
SYSTEM POWER: 7W/10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 813.3Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø93*h83mm
CUT OUT: Ø55mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management




Excellent
uniformity


STUNNING III M RO



MODEL: SP103-R⁺
SP103-R/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 982Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø83*h82mm(10W)
Ø83*h95mm(12W)
CUT OUT: Ø75mm




STUNNING III M RO T





MODEL: SP104-T⁺
SP104-T/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 982Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø110*h82mm(10W)
Ø110*h95mm(12W)
CUT OUT: Ø75mm




STUNNING III M SQ1




MODEL: SPQ105-R⁺
SPQ105-R/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 982Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: 83*83*h82mm(10W)
83*83*h95mm(12W)
CUT OUT: 76*76mm



STUNNING III M SQ1 T



MODEL: SPQ106-T⁺
SPQ106-T/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 982Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: 105*105*h82mm(10W)
105*105*h95mm(12W)
CUT OUT: 76*76mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management




Excellent
uniformity

STUNNING III M SQ2



MODEL: SPQ107-R
SPQ107-R/SR (S-River)
SYSTEM POWER: 2*10W/12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1965Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: 158*83*h82mm(10W)
158*83*h95mm(12W)
CUT OUT: 148*75mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management




Excellent
uniformity

STUNNING III M SQ3



MODEL: SPQ108-R
SPQ108-R/SR (S-River)
SYSTEM POWER: 3*10W/12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 2946Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: 233*83*h82mm(10W)
233*83*h95mm(12W)
CUT OUT: 225*76mm





POLARIS

Deep and agile like cat eyes,
specially developed for infants and young children,
meeting the light needs of children's eye development,
actively blocking a large amount of
harmful stray light.
Full spectrum display refers to the infinite proximity to natural light,
which moisturizes the eyes and is healthier.

CE CB TÜV CCC IP20 36V

POLARIS S




MODEL: MN108-R
MN108-R/SR (S-River)
SYSTEM POWER: 5W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 409.5Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø41*h60mm
CUT OUT: Ø35mm



POLARIS M



MODEL: MN109-R
MN109-R/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 572Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø51*h62mm
CUT OUT: Ø45mm



POLARIS L



MODEL: MN110-R 
MN110-R/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 828Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø61*h64mm
CUT OUT: Ø55mm



POLARIS L+



MODEL: MN111-R 
MN111-R/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 827Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø71*h70mm
CUT OUT: Ø65mm



POLARIS XL



MODEL: MN112-R 
MN112-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 981.5Lm
CRI: SINGLE COLOR Ra≥98(Natural spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø81*h60mm
CUT OUT: Ø75mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management




Excellent
visual comfort

ETERNAL

The patented spherical leak-proof optical element is combined with the calibration to adjust the light Angle and control the light ability accurately. The modular design facilitates the maintenance of the lamp, and the pull-out ring design efficiently takes out the main lamp body. Constant series light control spotlights give you high quality application scenarios.

CE CB TÜV CCC IP20 S-River

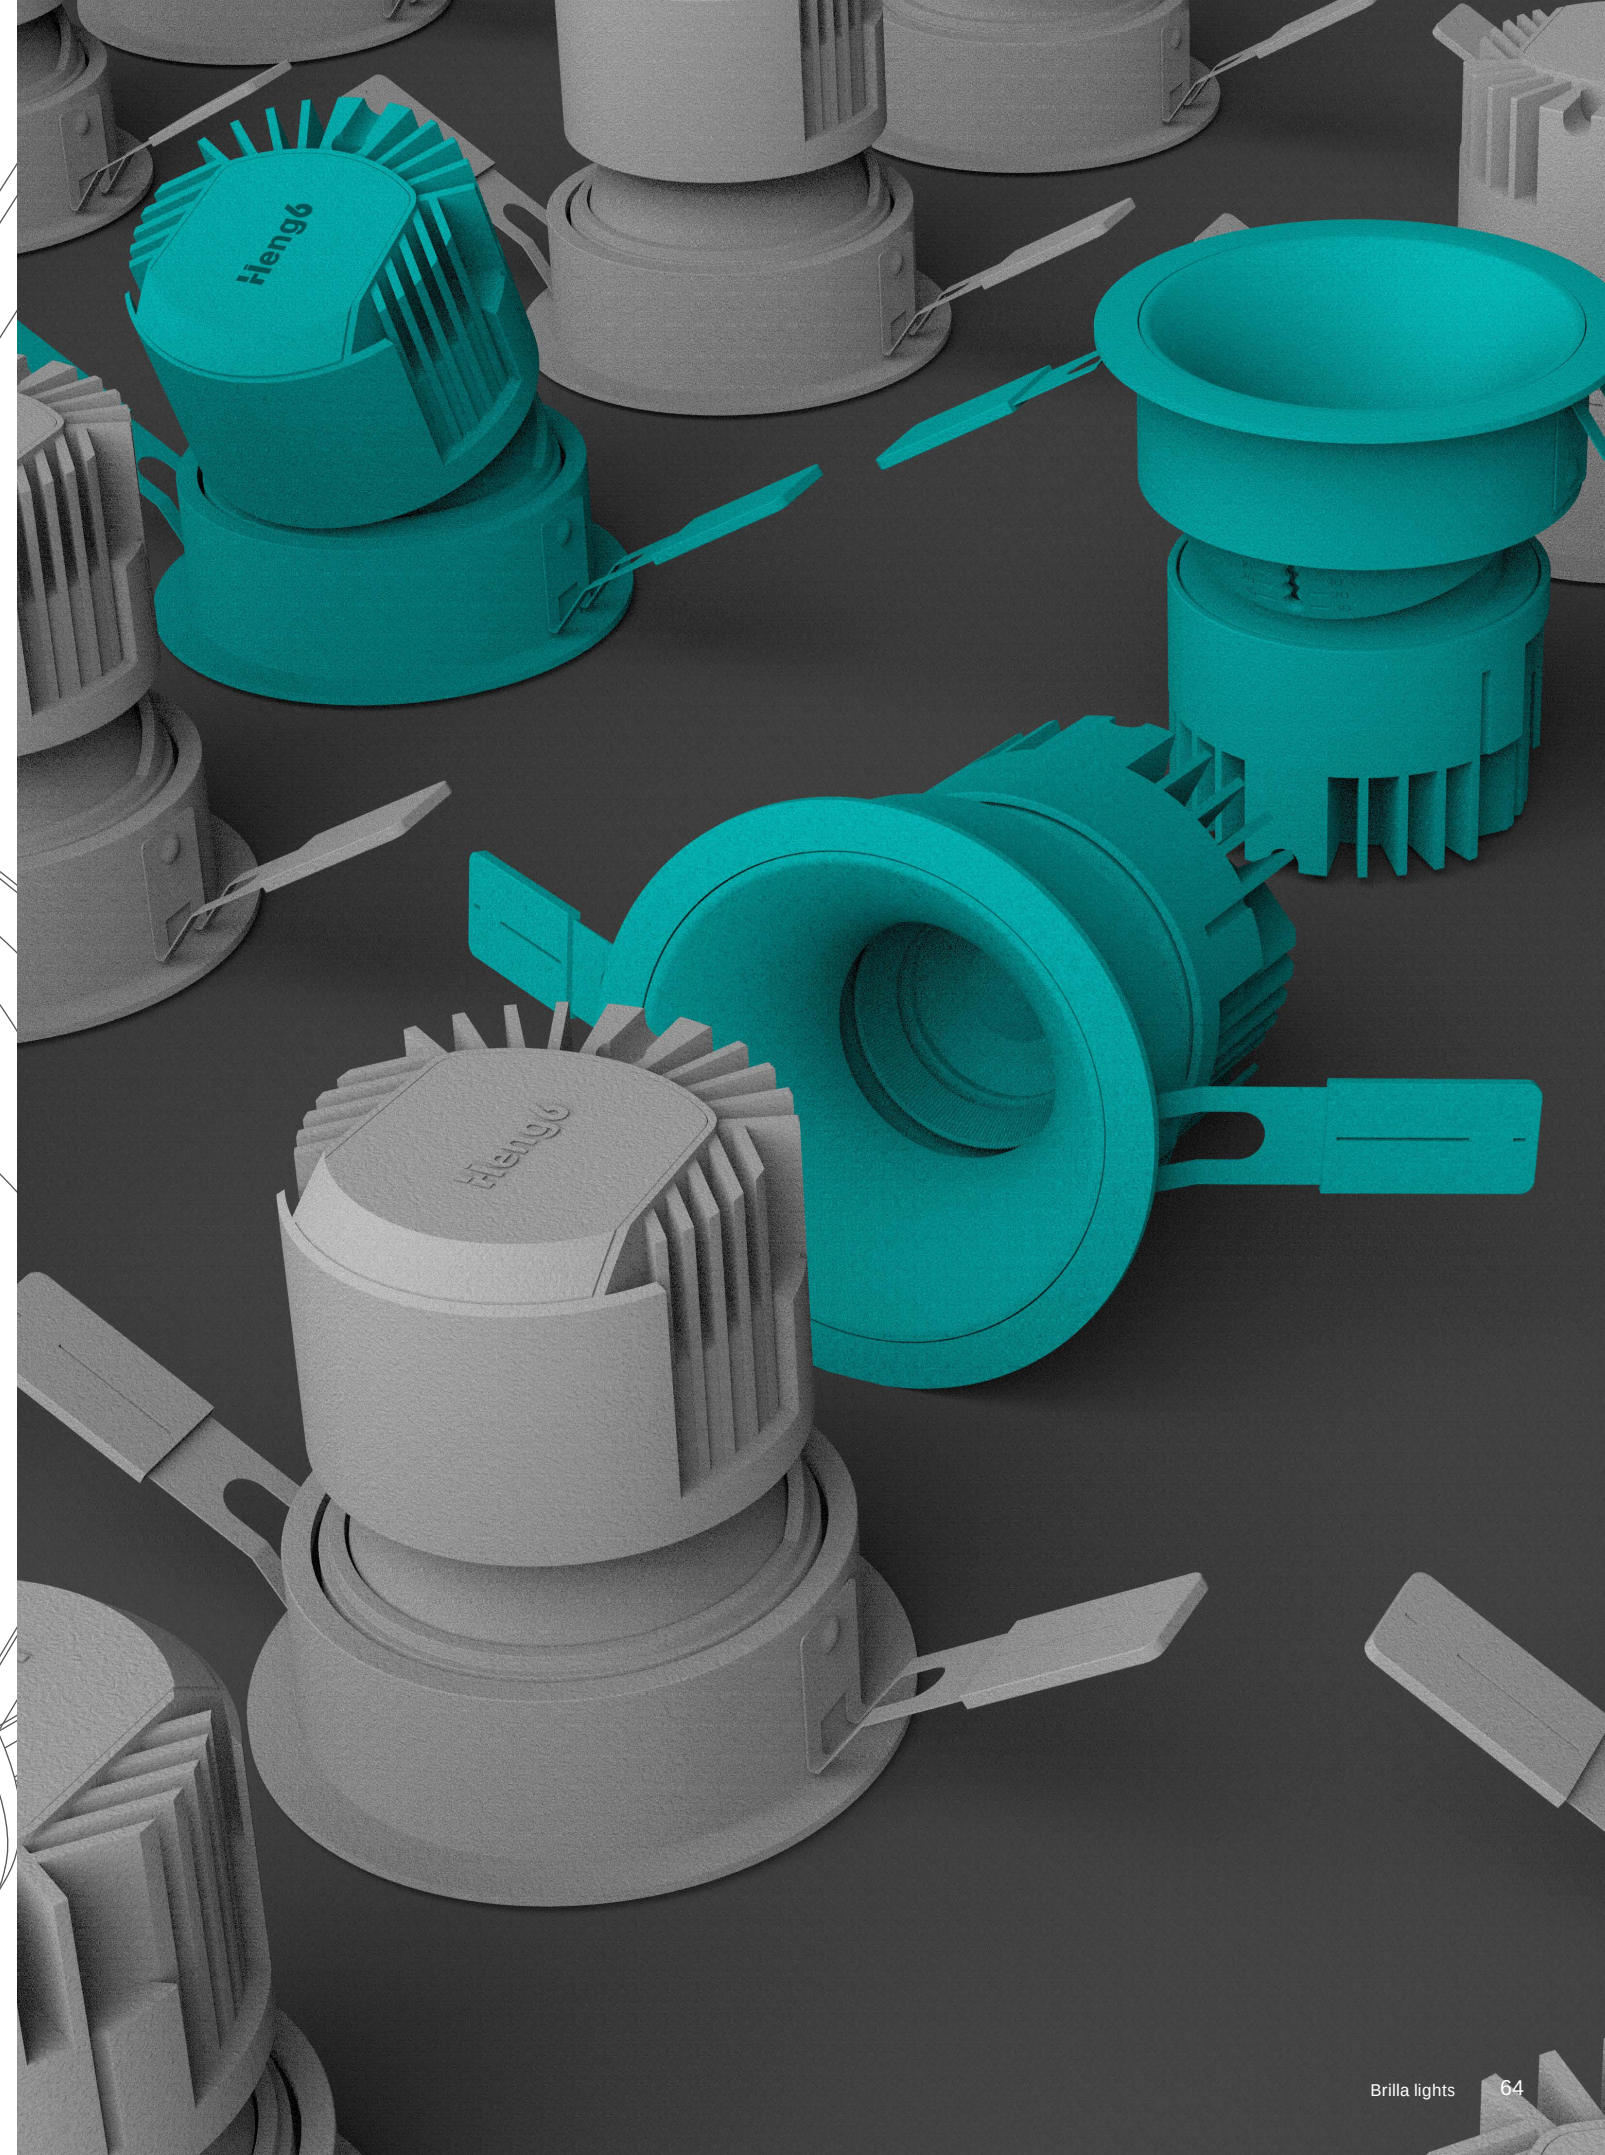

GRADE A DIE-CAST ALUMINUM (high-density)

Compared to die-cast aluminum material, the heat dissipation efficiency is increased by 30%. Meanwhile, it inhibits light decay and extends the product's lifespan.


30%

Improved heat dissipation capability.



EXCLUSIVE LOGO NAMEPLATE

The logo design of the Brilla lights brand is just right, perfectly reflecting visual taste.

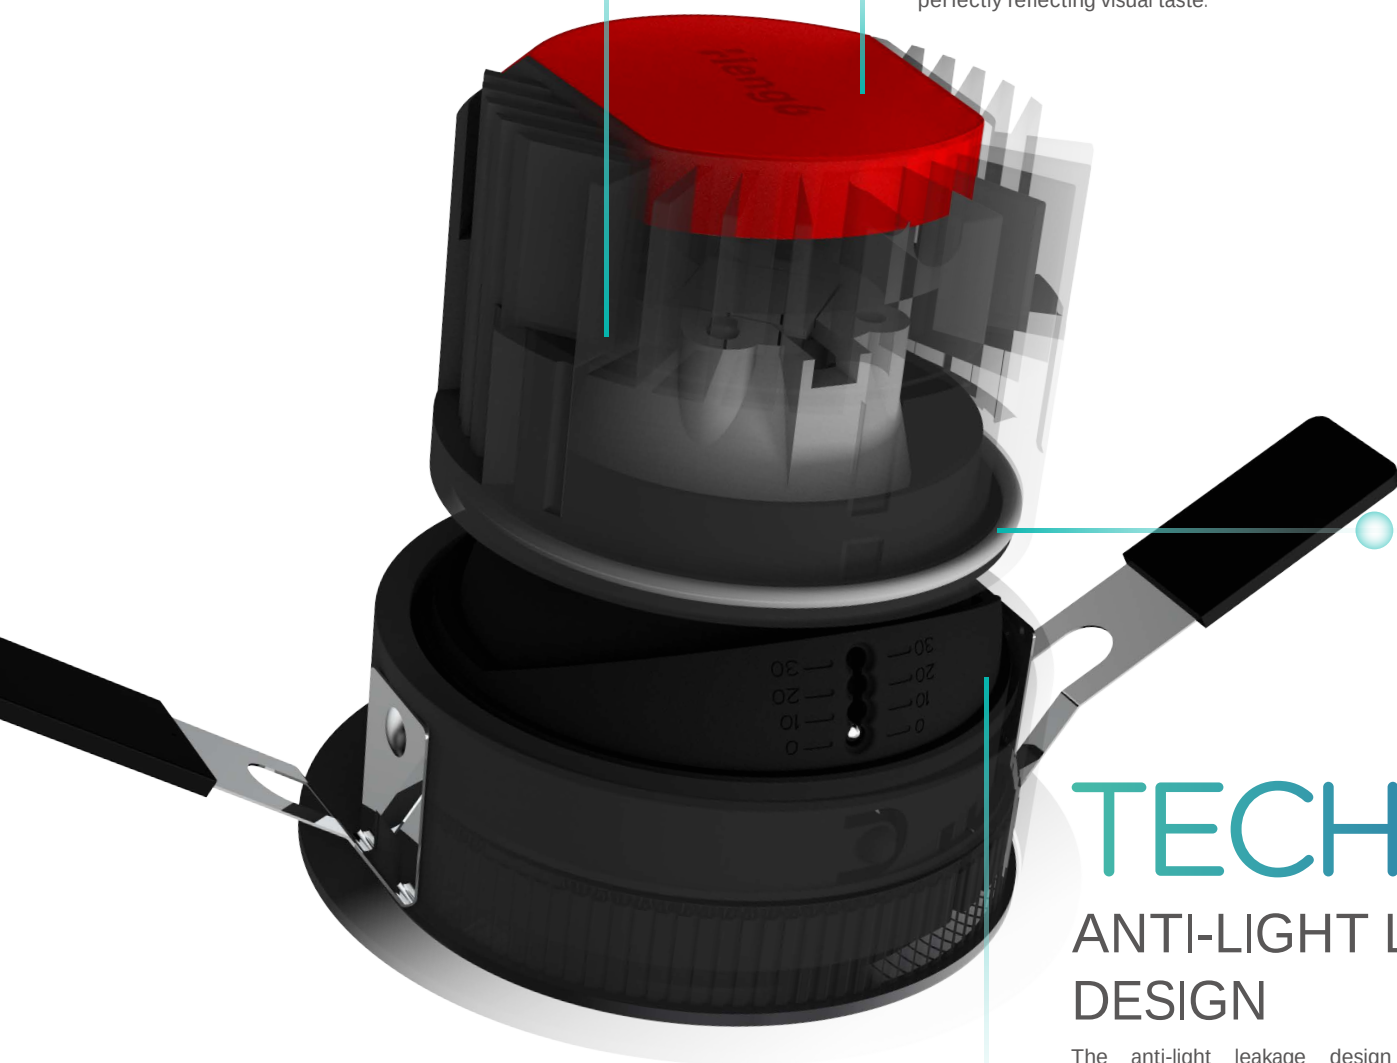

more.....

TECH¹ ANTI-LIGHT LEAKAGE DESIGN

The anti-light leakage design enhances the efficiency of light, reduces light loss, and prevents the ingress of mosquitoes and dust.

The positioning knob allows for precise control of light and angle.

The pull ring design makes maintenance more convenient and prevents damage to the ceiling.



R1-R15¹ | Ra 97



SUNLIKE

The lighting chips used are SUNLIKE chips from Seoul, South Korea.

Compared to other brands, the light has stronger penetration.

With higher saturation in R1-R15, the color rendering index (CRI) can reach 97.

This allows for a more accurate reproduction of object colors, close to the level of natural light, and effectively protects our eyesight.



MODULE STRUCTURE

The quick-release module structure allows for precise light control.

The optical design features a soft light spot, specifically tailored for applications that require wall grazing (with a small hill-shaped light pattern).

Whether it is the bezel, optical lens, or the color of the reflector cup, these components can be easily replaced according to the size of the objects being illuminated in the home and the specific lighting requirements of the space.

This flexibility helps achieve the desired lighting effects and enhances the efficiency and effectiveness of our lighting solutions.



PRODUCT APPLICABLE SCENARIOS


A. Home decoration (wall grazing): 36° beam angle.

B. Balcony, Hallway: 36° beam angle.

C. Commercial installation: Suitable for any space.

The ETERNAL Series focuses on high cost-performance models, suitable for both commercial and residential decoration.

It can be customized according to requirements for high light efficiency, different power levels, single color, dual colors, and compatibility with various smart control systems.

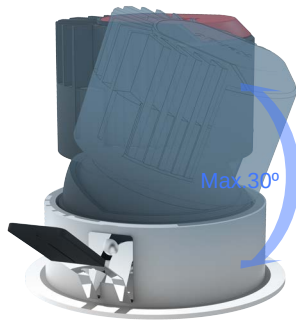


Max.30°
Adjustable light output
angle from 0°~30°

Max.355°
The horizontal rotation
angle of the lamp body
is 0°~355°
The actual rotation angle of the lamp
body structure is 360°.
To ensure that the electrical components
are not entangled, it is recommended
that the maximum horizontal rotation
angle be 355°.




ETERNAL M RO

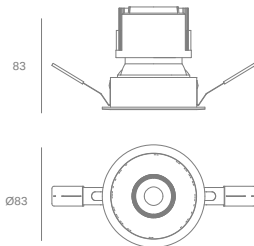

MODEL: SP302-R
SP302-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1141Lm
CRI: SINGLE COLOR Ra≥97,
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø83*h83mm
CUT OUT: Ø75mm



ETERNAL M RO T



MODEL: SP303-T
SP303-T/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1141Lm
CRI: SINGLE COLOR Ra≥97,
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø110*h83mm
CUT OUT: Ø75mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management





Excellent
uniformity


ETERNAL M SQ1




MODEL: SPQ304-R
SPQ304-R/SR (S River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1141Lm
CRI: SINGLE COLOR Ra≥97,
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 83*83*h83mm
CUT OUT: 76*76mm




ETERNAL M SQ1 T




MODEL: SPQ305-T
SPQ305-T/SR (S River)
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1141Lm
CRI: SINGLE COLOR Ra≥97,
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 105*105*h83mm
CUT OUT: 76*76mm





ETERNAL M SQ2

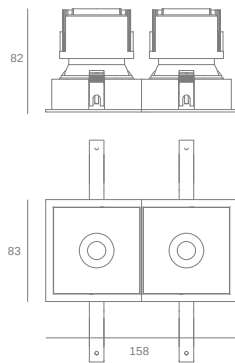



MODEL: SPQ306-R
SPQ306-R/SR (S River)
SYSTEM POWER: 2*12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 2282Lm
CRI: SINGLE COLOR Ra≥97,
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 158*83*h83mm
CUT OUT: 150*76mm



ETERNAL M SQ3



MODEL: SPQ307-R
SPQ307-R/SR (S River)
SYSTEM POWER: 3*12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 3423Lm
CRI: SINGLE COLOR Ra≥97,
TWO COLOR Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 233*83*h83mm
CUT OUT: 225*76mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
uniformity



GLORIA



The GLORIA beauty spotlight series adopts polarized design, which can prevent the light from casting shadows on the face.

The new generation of polarized TIR lens technology skillfully illuminates beauty and reveals the true essence of your skin.


The new technology addresses the drawbacks of illumination shadows caused by traditional "collimated light paths" and eliminates the dull shadows on the face produced by direct light.

The special color rendering index R15 is as high as 98.

CE CB TUV CCC IP20 36V

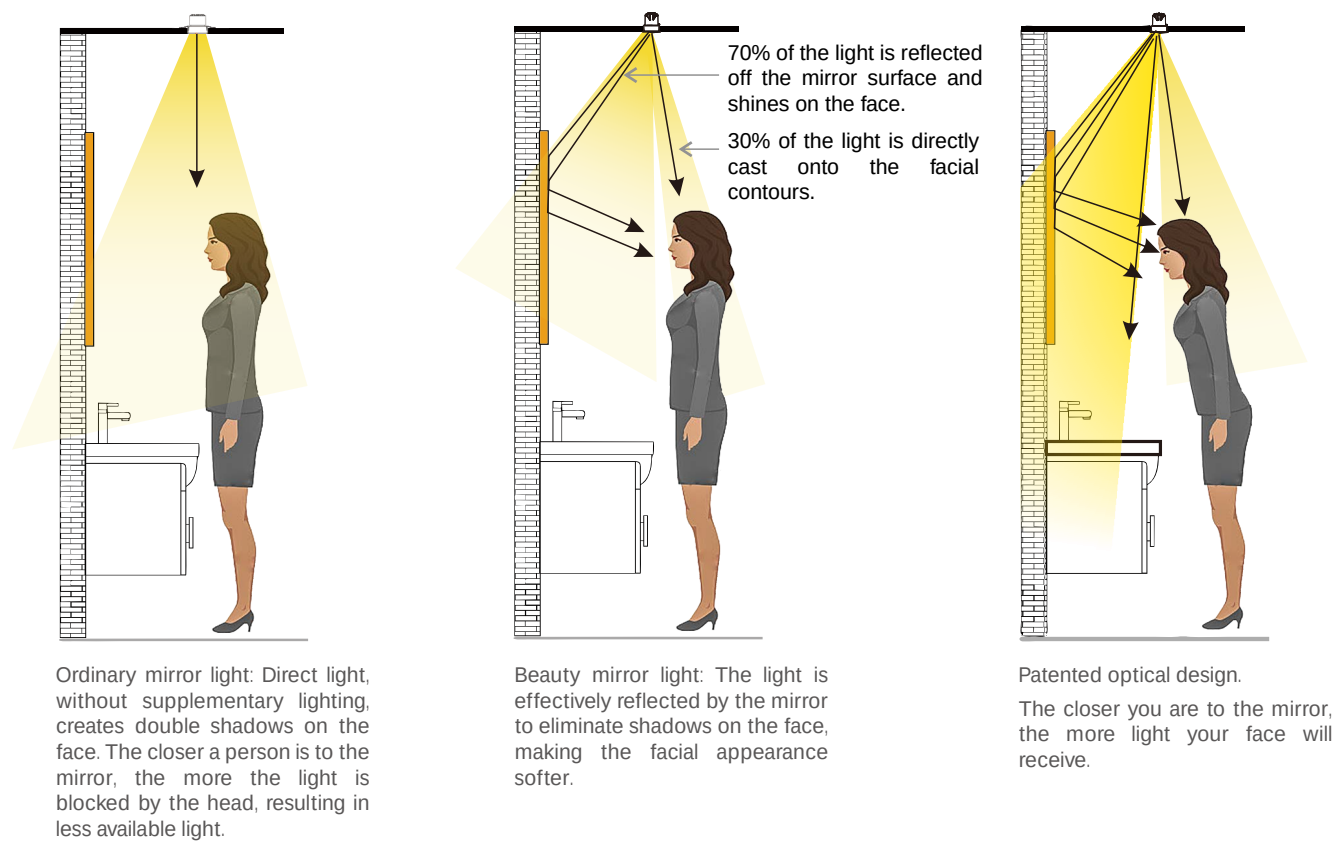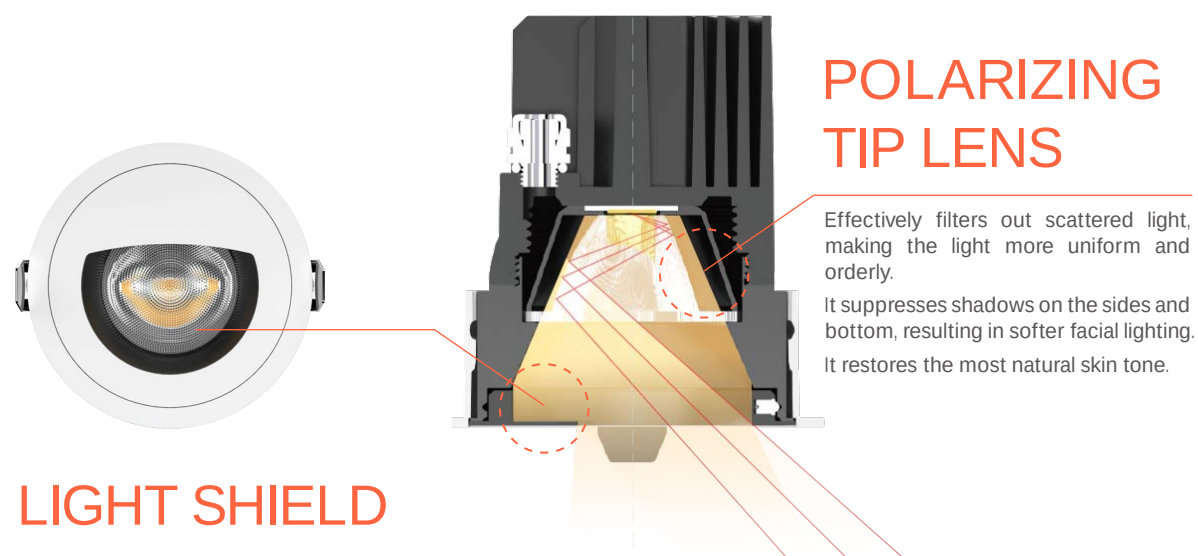

GLORIA M P

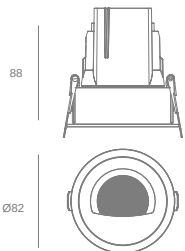

MODEL: SP408-R
SP408-R/SR(SRiver)
SYSTEM POWER: 12W
ANGLE: P(POLARIZED LIGHT)
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1167.6Lm
CRI: SINGLE COLOR Ra≥97,
TWO COLOR Ra≥98
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø82*h88mm
CUT OUT: Ø75mm



Polarized
light



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort




NOBLE/T

A tube lamp designed specifically for cost-effectiveness.
Deep anti glare design, eye protection without glare.

CE CB TÜV CCC IP20 36V

NOBLE/T



MODEL: SP413-R
SP413-R/QM(QM)
SYSTEM POWER: 10W
ANGLE: 24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 942Lm
CRI: SINGLE COLOR Ra≥95,
TWO COLOR Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø84*h56mm
CUT OUT: Ø75mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Max.30°
Adjustable light output
angle from 0°-30°

Max.355°
The horizontal rotation
angle of the lamp body
is 0°-355°

The actual rotation angle of the lamp
body structure is 360°
To ensure that the electrical components
are not entangled, it is recommended
that the maximum horizontal rotation
angle be 355°



NOBLE/S

A spotlight designed specifically for cost-effectiveness.
Double anti glare design, adjustable light angle from 0-30 °

CE CB TÜV CCC IP20 36V



NOBLE/S S



MODEL: SP411-R
SP411-R/QM(QIM)
SYSTEM POWER: 7W
ANGLE: 24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 661Lm
CRI: SINGLE COLOR Ra≥95,
TWO COLOR Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø64*h75mm
CUT OUT: Ø55mm



NOBLE/S M



MODEL: SP412-R
SP412-R/QM(QIM)
SYSTEM POWER: 10W
ANGLE: 24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 942Lm
CRI: SINGLE COLOR Ra≥95,
TWO COLOR Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø84*h82mm
CUT OUT: Ø75mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management




Excellent
visibility



DRAGONFLY/S

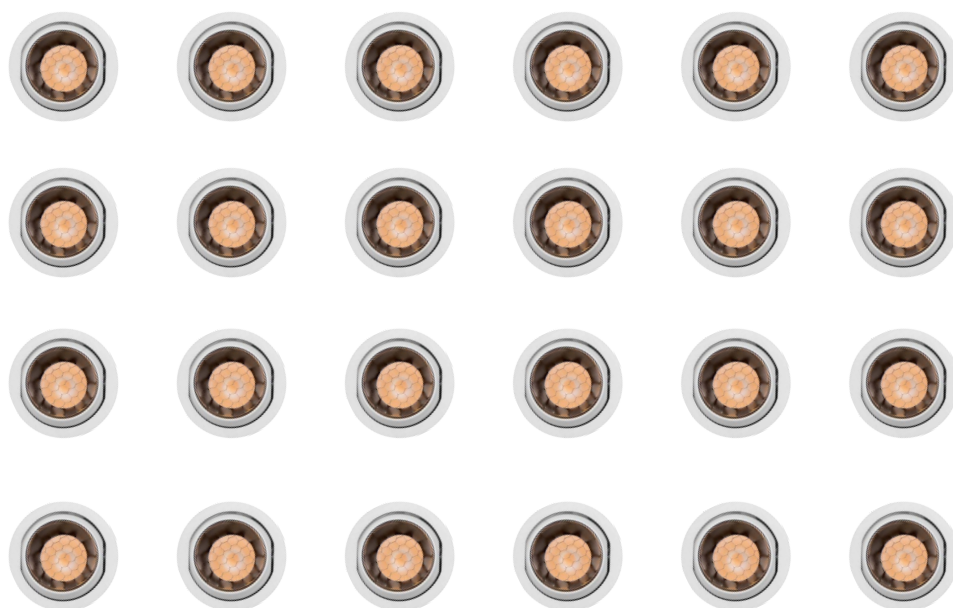

anti-glare
The anti-glare structure
of the cellular
network effectively filters
harsh light




HL-ZN-QT41 / HL-ZN-QT51
DRAGONFLY/S Recessed Fixed



HL-ZN-QT40 / HL-ZN-QT50
DRAGONFLY/S Recessed Adjust

Max.20°
Adjustable light output
angle from 0°~20°


DRAGONFLY/S S



MODEL: MN101-R
MN101-R/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K, 5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 632Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø44*h90mm
CUT OUT: Ø40mm





DRAGONFLY/S M



MODEL: MN103-R
MN103-R/SR(S-River)
SYSTEM POWER: 10W
ANGLE: 24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K, 5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 925Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø56*h101mm
CUT OUT: Ø50mm




DRAGONFLY/S S AD



MODEL: MN102-R
MN102-R/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K, 5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 632Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø44*h90mm
CUT OUT: Ø40mm



DRAGONFLY/S M AD



MODEL: MN104-R
MN104-R/SR(S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°
CCT: SINGLE COLOR 3000K,3500K,4000K, 5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 925Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø56*h101mm
CUT OUT: Ø50mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



DRAGONFLY

Lightweight and exquisite appearance,
hidden with high-energy dragonfly series boutique spotlights,
and a tall and elegant radiator with a simple appearance,
like a lively dragonfly dancing gracefully.
Small lamp body but with high power.

CE CB TÜV CCC IP20 36V

DRAGONFLY M



MODEL: MN113-R
MN113-R/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 811.5Lm
CRI: SINGLE COLOR Ra≥98(Full Spectrum),
TWO COLOR Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: Sun like
SIZE: Ø56*h100mm
CUT OUT: Ø50mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort

WISDOM

WISDOM series is a waterproof tube lamp that effectively prevents the erosion of water, fog, and oil fumes, making it very suitable for use in bathrooms, toilets, and kitchens. The entire series is equipped with high-quality optical lenses, clean and free of stray light, and deep hidden light source anti glare effect. There are multiple options for reflective cup accessories to create ideal lighting effects.

CE CB TÜV   IP65 36V




The precise anti dazzle control design applied to the secondary optical refraction curve design and scientific deepening of the distance between the light source and the light emitting surface, as well as good electroplating treatment, have achieved high-performance flicker free performance in the dark.

The effective anti dazzle area reaches up to 60 °, creating a quiet and comfortable lighting atmosphere without looking at the lights.






Effectively prevent external dust from entering the lamp body and causing component aging and poor contact, while also preventing sprayed water from entering the interior of the lamp body.

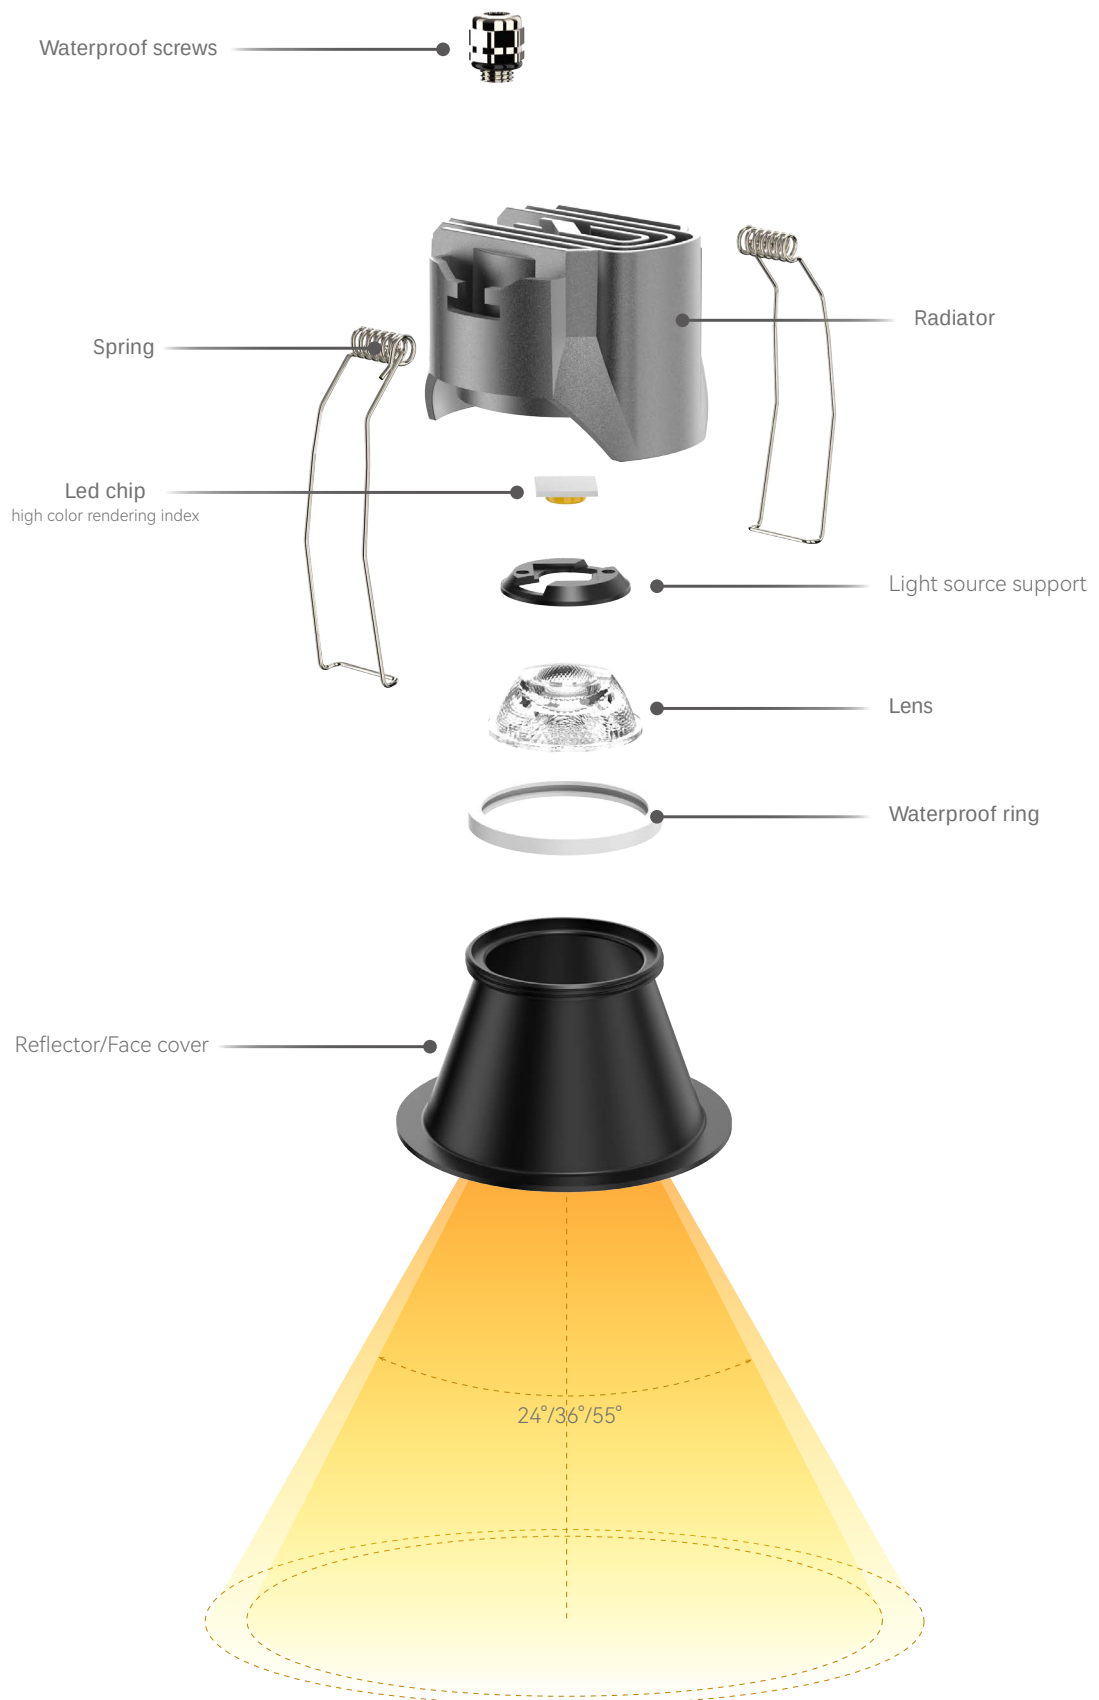




WISDOM S

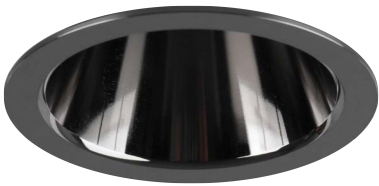

WISDOM XL



WISDOM M



WISDOM L



Deep cover



Basic cover



Deep cover





Basic cover




WISDOM S

MODEL: DL648-R7W55
DL652-R7W55
SYSTEM POWER: 7W
ANGLE: 24°/36°/55°
CCT: 2700K-6500K
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø65*h72/52mm
CUT OUT: Ø55mm





WISDOM M

MODEL: DL649-R12W75
DL653-R12W75
SYSTEM POWER: 12W
ANGLE: 24°/36°/55°
CCT: 2700K-6500K
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø85*h79/59mm
CUT OUT: Ø75mm




WISDOM L


MODEL: DL650-R20W95
DL654-R20W95
SYSTEM POWER: 20W
ANGLE: 24°/36°/55°
CCT: 2700K-6500K
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø105*h94/68mm
CUT OUT: Ø95mm



WISDOM XL

MODEL: DL651-R28W115
DL655-R28W115
SYSTEM POWER: 28W
ANGLE: 24°/36°/55°
CCT: 2700K-6500K
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø135*h107/80mm
CUT OUT: Ø115mm



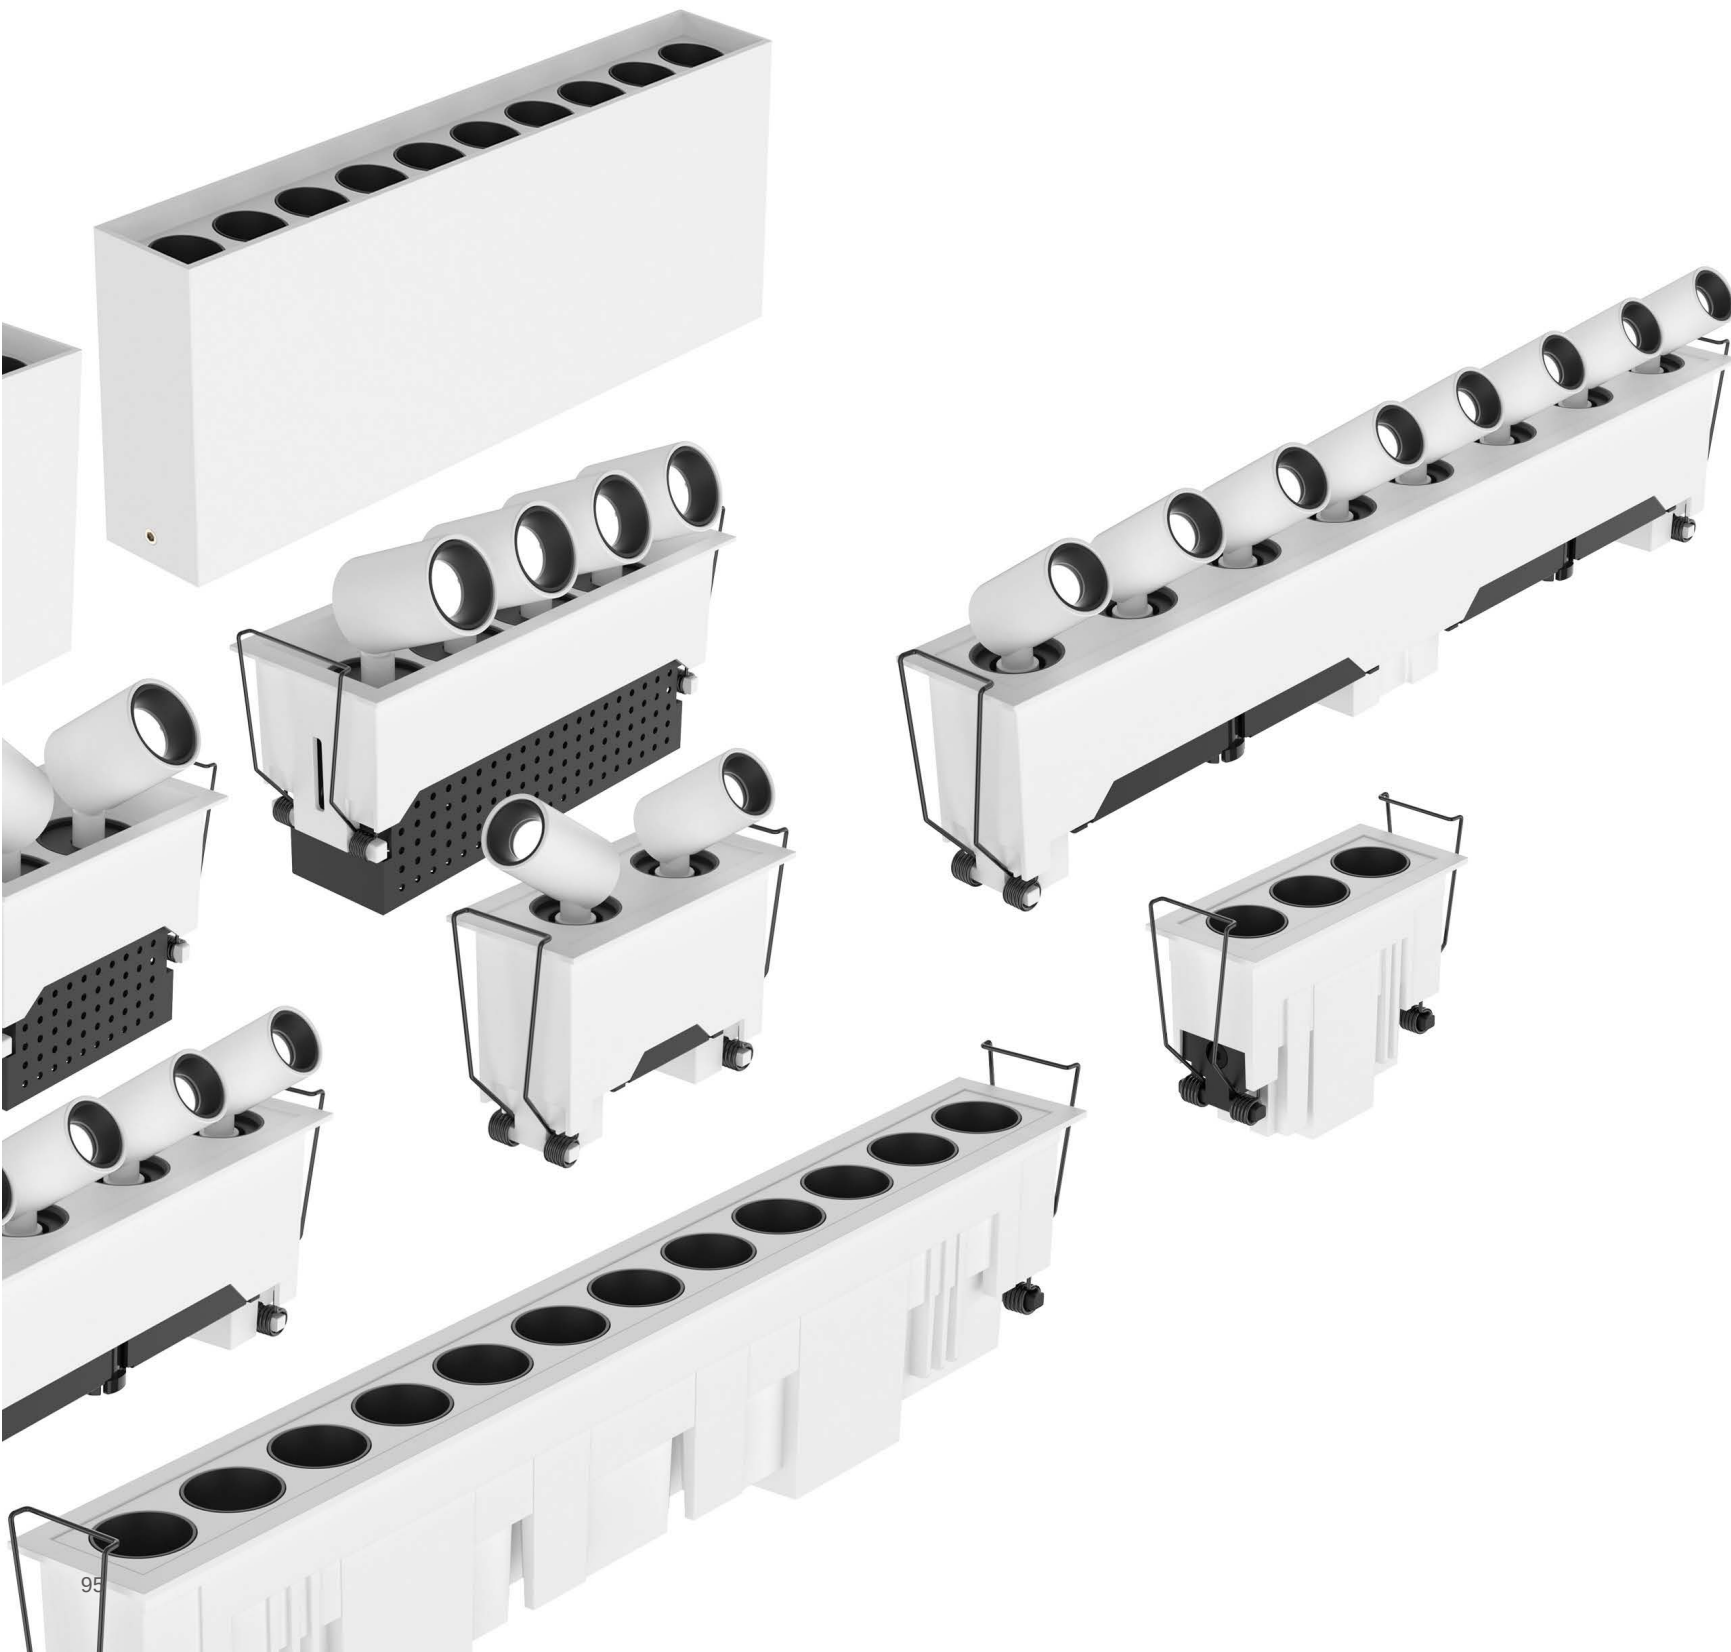


ENDLESS II PRO


The independently developed structure and super strong heat dissipation performance provide more stable performance, s lower light decay, and longer service life, achieving true small lamp body high power.

CE CB TUV CCC IP20

FINISHING



White



Black



ENDLESS II PRO IN1
GR201-R



ENDLESS II PRO IN2
GR202-R




ENDLESS II PRO IN3
GR203-R




ENDLESS II PRO IN4
GR204-R




ENDLESS II PRO IN5
GR205-R



ENDLESS II PRO IN6
GR206-R

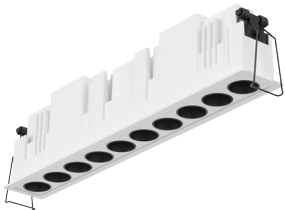

ENDLESS II PRO IN10
GR207-R

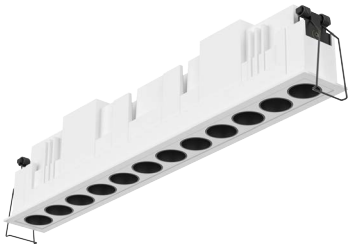


ENDLESS II PRO IN12
GR208-R



ENDLESS II PRO IN2 S AD
GR209-R




ENDLESS II PRO IN4 S AD
GR210-R

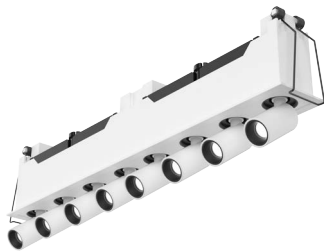

ENDLESS II PRO IN8 S AD
GR211-R




ENDLESS II PRO IN2 M AD
GR212-R




ENDLESS II PRO IN4 M AD
GR213-R




ENDLESS II PRO IN8 M AD
GR214-R



ENDLESS II PRO ON3
SF215-M




ENDLESS II PRO ON5
SF216-M

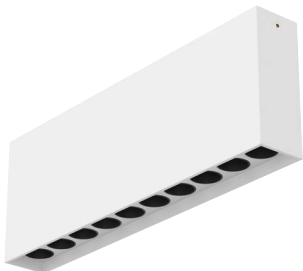


ENDLESS II PRO ON10
SF217-M


ENDLESS II PRO IN1




MODEL: GR201-R
GR201-R/SR (S-River)
SYSTEM POWER: 2.5W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 237.5Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 31.5*31.5*h55mm
CUT OUT: 25*25mm



ENDLESS II PRO IN2



MODEL: GR202-R
GR202-R/SR (S-River)
SYSTEM POWER: 4W
ANGLE: 10°/15°/24°/35°/50°
CCT: 2700K-6000K
LUMINOUS FLUX: 376Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 53.5*31.5*h55mm
CUT OUT: 47*25mm



Fixed



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management




Excellent
visual comfort


ENDLESS II PRO IN3




MODEL: GR203-R
GR203-R/SR (S-River)
SYSTEM POWER: 6W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 564.6Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 75*31.5*h55mm
CUT OUT: 69*25mm




ENDLESS II PRO IN4




MODEL: GR204-R
GR204-R/SR (S-River)
SYSTEM POWER: 8W
ANGLE: 10°/15°/24°/35°/50°
CCT: 2700K-6000K
LUMINOUS FLUX: 753Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 96.5*31.5*h55mm
CUT OUT: 90*25mm





ENDLESS II PRO IN5




MODEL: GR205-R
GR205-R/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 940Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 118.5*31.5*h55mm
CUT OUT: 112*25mm



ENDLESS II PRO IN6



MODEL: GR206-R
GR206-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 10°/15°/24°/35°/50°
CCT: 2700K-6000K
LUMINOUS FLUX: 1130Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 140*31.5*h55mm
CUT OUT: 133*25mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Fixed



Certificate
mark



IP rating



Different light
colours





Excellent
thermal
management




Excellent
visual comfort



ENDLESS II PRO IN10

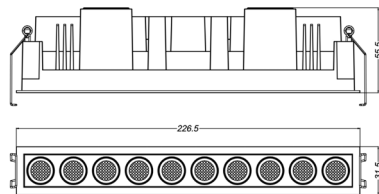

MODEL: GR207-R
GR207-R/SR (S-River)
SYSTEM POWER: 25W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 2361Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 226.5*31.5*h55mm
CUT OUT: 222*25mm




ENDLESS II PRO IN12

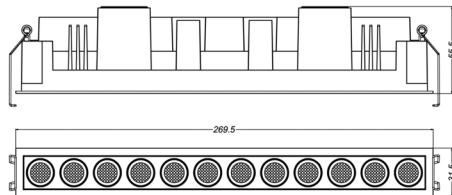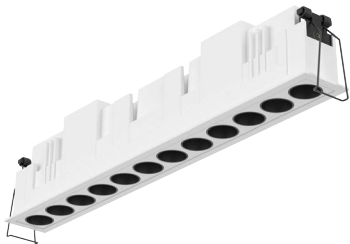


MODEL: GR208-R
GR208-R/SR (S-River)
SYSTEM POWER: 30W
ANGLE: 10°/15°/24°/35°/50°
CCT: 2700K-6000K
LUMINOUS FLUX: 2823Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 269.5*31.5*h55mm
CUT OUT: 263*25mm




ENDLESS II PRO IN2 S AD




MODEL: GR209-R
GR209-R/SR (S-River)
SYSTEM POWER: 4W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 382Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 70.5*32*h58mm
CUT OUT: 63*25mm



ENDLESS II PRO IN4 S AD



MODEL: GR210-R
GR210-R/SR (S-River)
SYSTEM POWER: 8W
ANGLE: 10°/15°/24°/35°/50°
CCT: 2700K-6000K
LUMINOUS FLUX: 765Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 127.5*32*h58mm
CUT OUT: 120*25mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management





Excellent
visual comfort

ENDLESS II PRO IN8 S AD

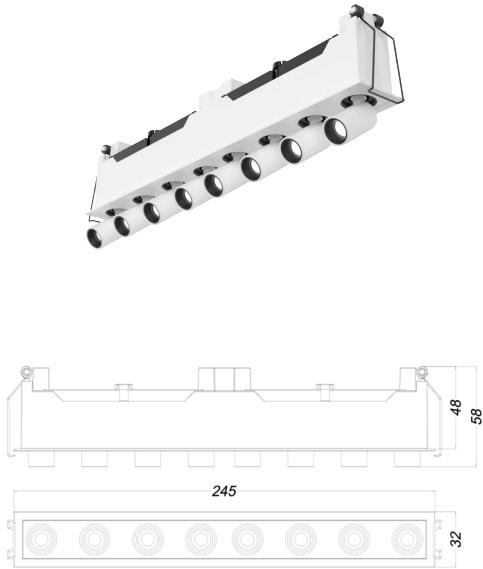

MODEL: GR211-R
GR211-R/SR (S-River)
SYSTEM POWER: 2*8W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1517Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 245*32*h58mm
CUT OUT: 240*25mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management





Excellent
visual comfort

ENDLESS II PRO IN2 M AD



MODEL: GR212-R
GR212-R/SR (S-River)
SYSTEM POWER: 6W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 564.6Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 85*46*h72.5mm
CUT OUT: 78*38mm



Adjustable



Certificate
mark



IP rating



Different light
colours





Excellent
thermal
management




Excellent
visual comfort


ENDLESS II PRO IN4 M AD





MODEL: GR213-R
GR213-R/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 10°/15°/24°/35°/50°
CCT: 2700K-6000K
LUMINOUS FLUX: 941Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 141.5*46*h72.5mm
CUT OUT: 135*38mm



ENDLESS II PRO IN8 M AD

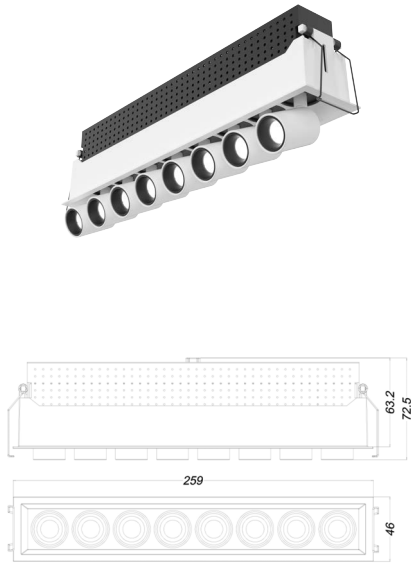

MODEL: GR214-R
GR214-R/SR (S-River)
SYSTEM POWER: 2*10W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1882Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 259*46*h72.5mm
CUT OUT: 252*38mm



Adjustable



Certificate
mark



IP rating



Different light
colours





Excellent
thermal
management



Excellent
visual comfort

ENDLESS II PRO ON3



MODEL: SF215-M
SF215-M/SR (S-River)
SYSTEM POWER: 6W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 564.6Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 74*30*h80mm
CUT OUT: /



Fixed



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management



Excellent
visual comfort



ENDLESS II PRO ON5



MODEL: SF216-M
SF216-M/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 10°/15°/24°/35°/50°
CCT: 2700K-6000K
LUMINOUS FLUX: 941Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 117*30*h80mm
CUT OUT: /



ENDLESS II PRO ON10

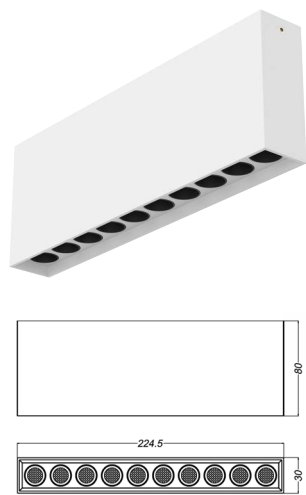

MODEL: SF217-M
SF217-M/SR (S-River)
SYSTEM POWER: 2*10W
ANGLE: 10°/15°/24°/35°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1882Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 224.5*30*h80mm
CUT OUT: /



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management





Excellent
visual comfort

ENDLESS

The independently developed structure and super strong heat dissipation performance provide more stable performance, s lower light decay, and longer service life, achieving true small lamp body high power.

CE CB TÜV   IP20

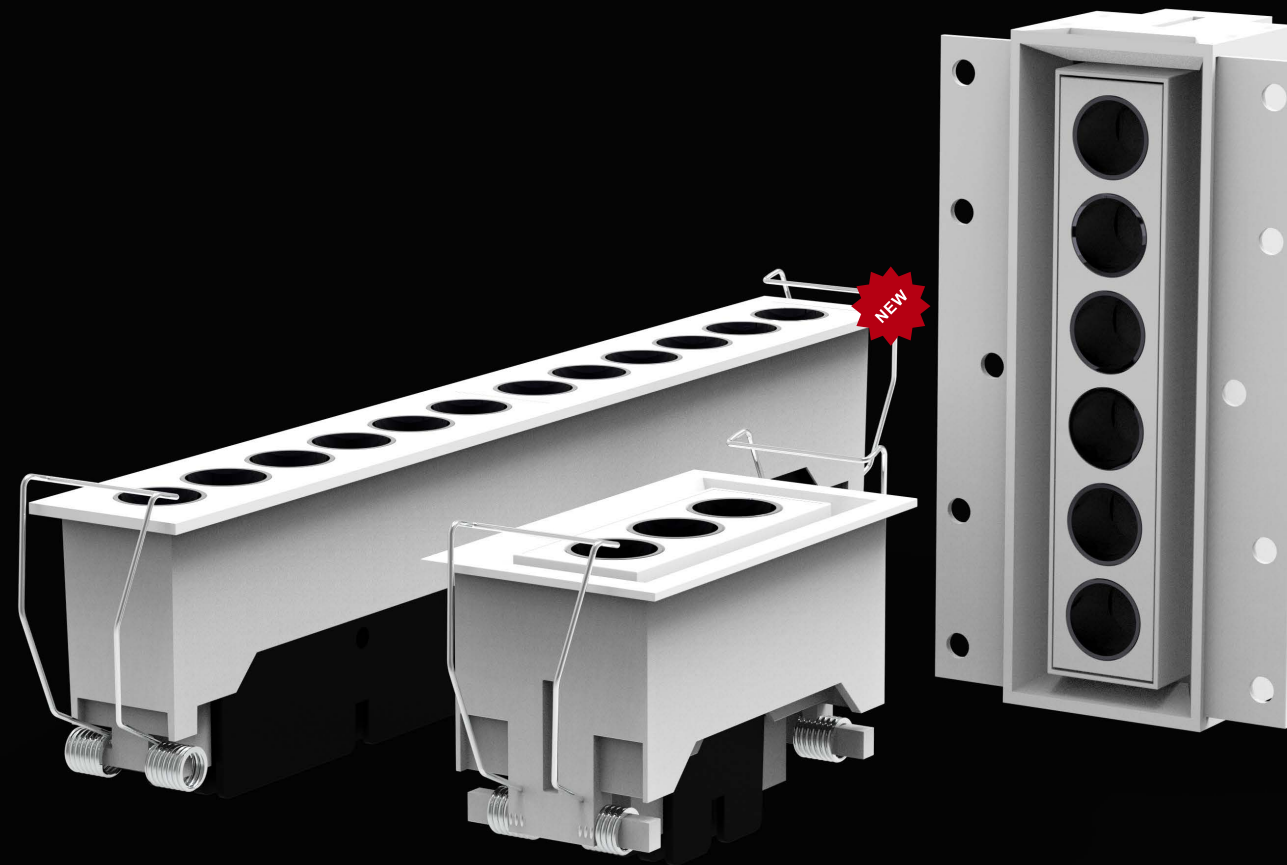

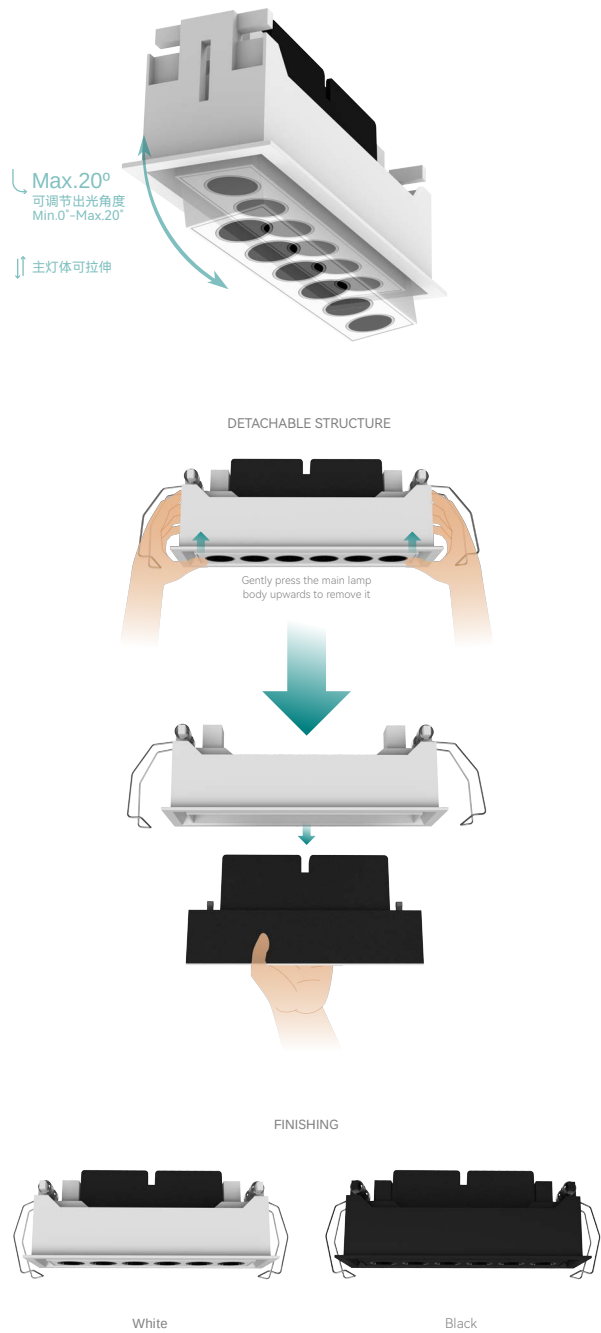

ENDLESS Recessed Fixed/3
HL-YH-CG8616
HL-YH-ZN8617



ENDLESS Recessed Fixed/6
HL-YH-CG8618
HL-YH-ZN8619



ENDLESS Recessed Fixed/12
HL-YH-CG8620
HL-YH-ZN8621



ENDLESS Trimless Fixed/3
HL-YH-CG8628
HL-YH-ZN8629



ENDLESS Trimless Fixed/6
HL-YH-CG8630
HL-YH-ZN8631



ENDLESS Trimless Fixed/12
HL-YH-CG8632
HL-YH-ZN8633



ENDLESS Recessed Adjust/3
HL-YH-CG8622
HL-YH-ZN8623



ENDLESS Recessed Adjust/6
HL-YH-CG8624
HL-YH-ZN8625




ENDLESS Recessed Adjust/12
HL-YH-CG8626
HL-YH-ZN8627



ENDLESS Trimless Adjust/3
HL-YH-CG8634
HL-YH-ZN8635





ENDLESS Trimless Adjust/6
HL-YH-CG8636
HL-YH-ZN8637




ENDLESS Trimless Adjust/12
HL-YH-CG8638
HL-YH-ZN8639



ENDLESS 3




MODEL: GR101-R
GR101-R/SR (S-River)
SYSTEM POWER: 6W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 564.5Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 70*32*h58mm
CUT OUT: 63*25mm



ENDLESS 3 T



MODEL: GR104-T
GR104-T/SR (S-River)
SYSTEM POWER: 6W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 564.5Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 65*75*h58mm
CUT OUT: 67*35mm



Fixed



Certificate
mark



IP rating



Different light
colours





Excellent
thermal
management




Excellent
visual comfort



ENDLESS 6




MODEL: GR102-R
GR102-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 1135.5Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 127*32*h58mm
CUT OUT: 120*25mm





ENDLESS 6 T




MODEL: GR105-T
GR105-T/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 1135.5Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 122*70*h58mm
CUT OUT: 124*35mm





ENDLESS 12

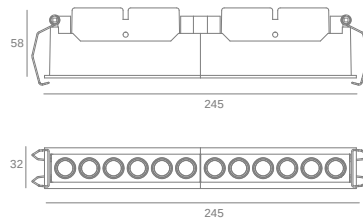


MODEL: GR103-R
GR103-R/SR (S-River)
SYSTEM POWER: 2*12W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 2271Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 245*32*h58mm
CUT OUT: 240*25mm



ENDLESS 12 T



MODEL: GR106-T
GR106-T/SR (S-River)
SYSTEM POWER: 2*12W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 2271Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 245*70*h58mm
CUT OUT: 241*35mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Fixed



Certificate
mark



IP rating



Different light
colours





Excellent
thermal
management




Excellent
visual comfort


ENDLESS 3 AD




MODEL: GR107-R
GR107-R/SR (S-River)
SYSTEM POWER: 6W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 564Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 85*46*h58mm
CUT OUT: 78*38mm





ENDLESS 3 AD T




MODEL: GR110-T
GR110-T/SR (S-River)
SYSTEM POWER: 6W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 564Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 76*80*h59mm
CUT OUT: 78*45mm




ENDLESS 6 AD




MODEL: GR108-R
GR108-R/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 1135.5Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 142*46*h58mm
CUT OUT: 135*38mm



ENDLESS 6 AD T



MODEL: GR111-T
GR111-T/SR (S-River)
SYSTEM POWER: 12W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 1135.5Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 133*80*h59mm
CUT OUT: 135*45mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Adjustable



Certificate
mark



IP rating



Different light
colours





Excellent
thermal
management




Excellent
visual comfort



ENDLESS 12 AD

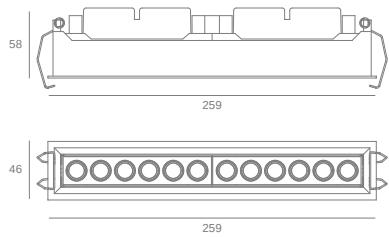


MODEL: GR109-R
GR109-R/SR (S-River)
SYSTEM POWER: 2*12W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 2271Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 259*46*h58mm
CUT OUT: 252*38mm



ENDLESS 12 AD T

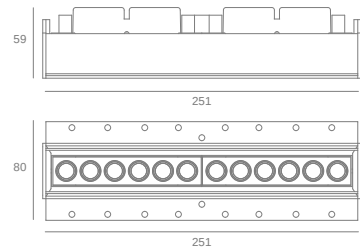

MODEL: GR112-T
GR112-T/SR (S-River)
SYSTEM POWER: 2*12W
ANGLE: 20°/40°
CCT: 2700K-6000K
LUMINOUS FLUX: 2271Lm
CRI: Ra≥95
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 251*80*h59mm
CUT OUT: 253*45mm



Adjustable



Certificate
mark



IP rating




Different light
colours




Excellent
thermal
management




Excellent
visual comfort

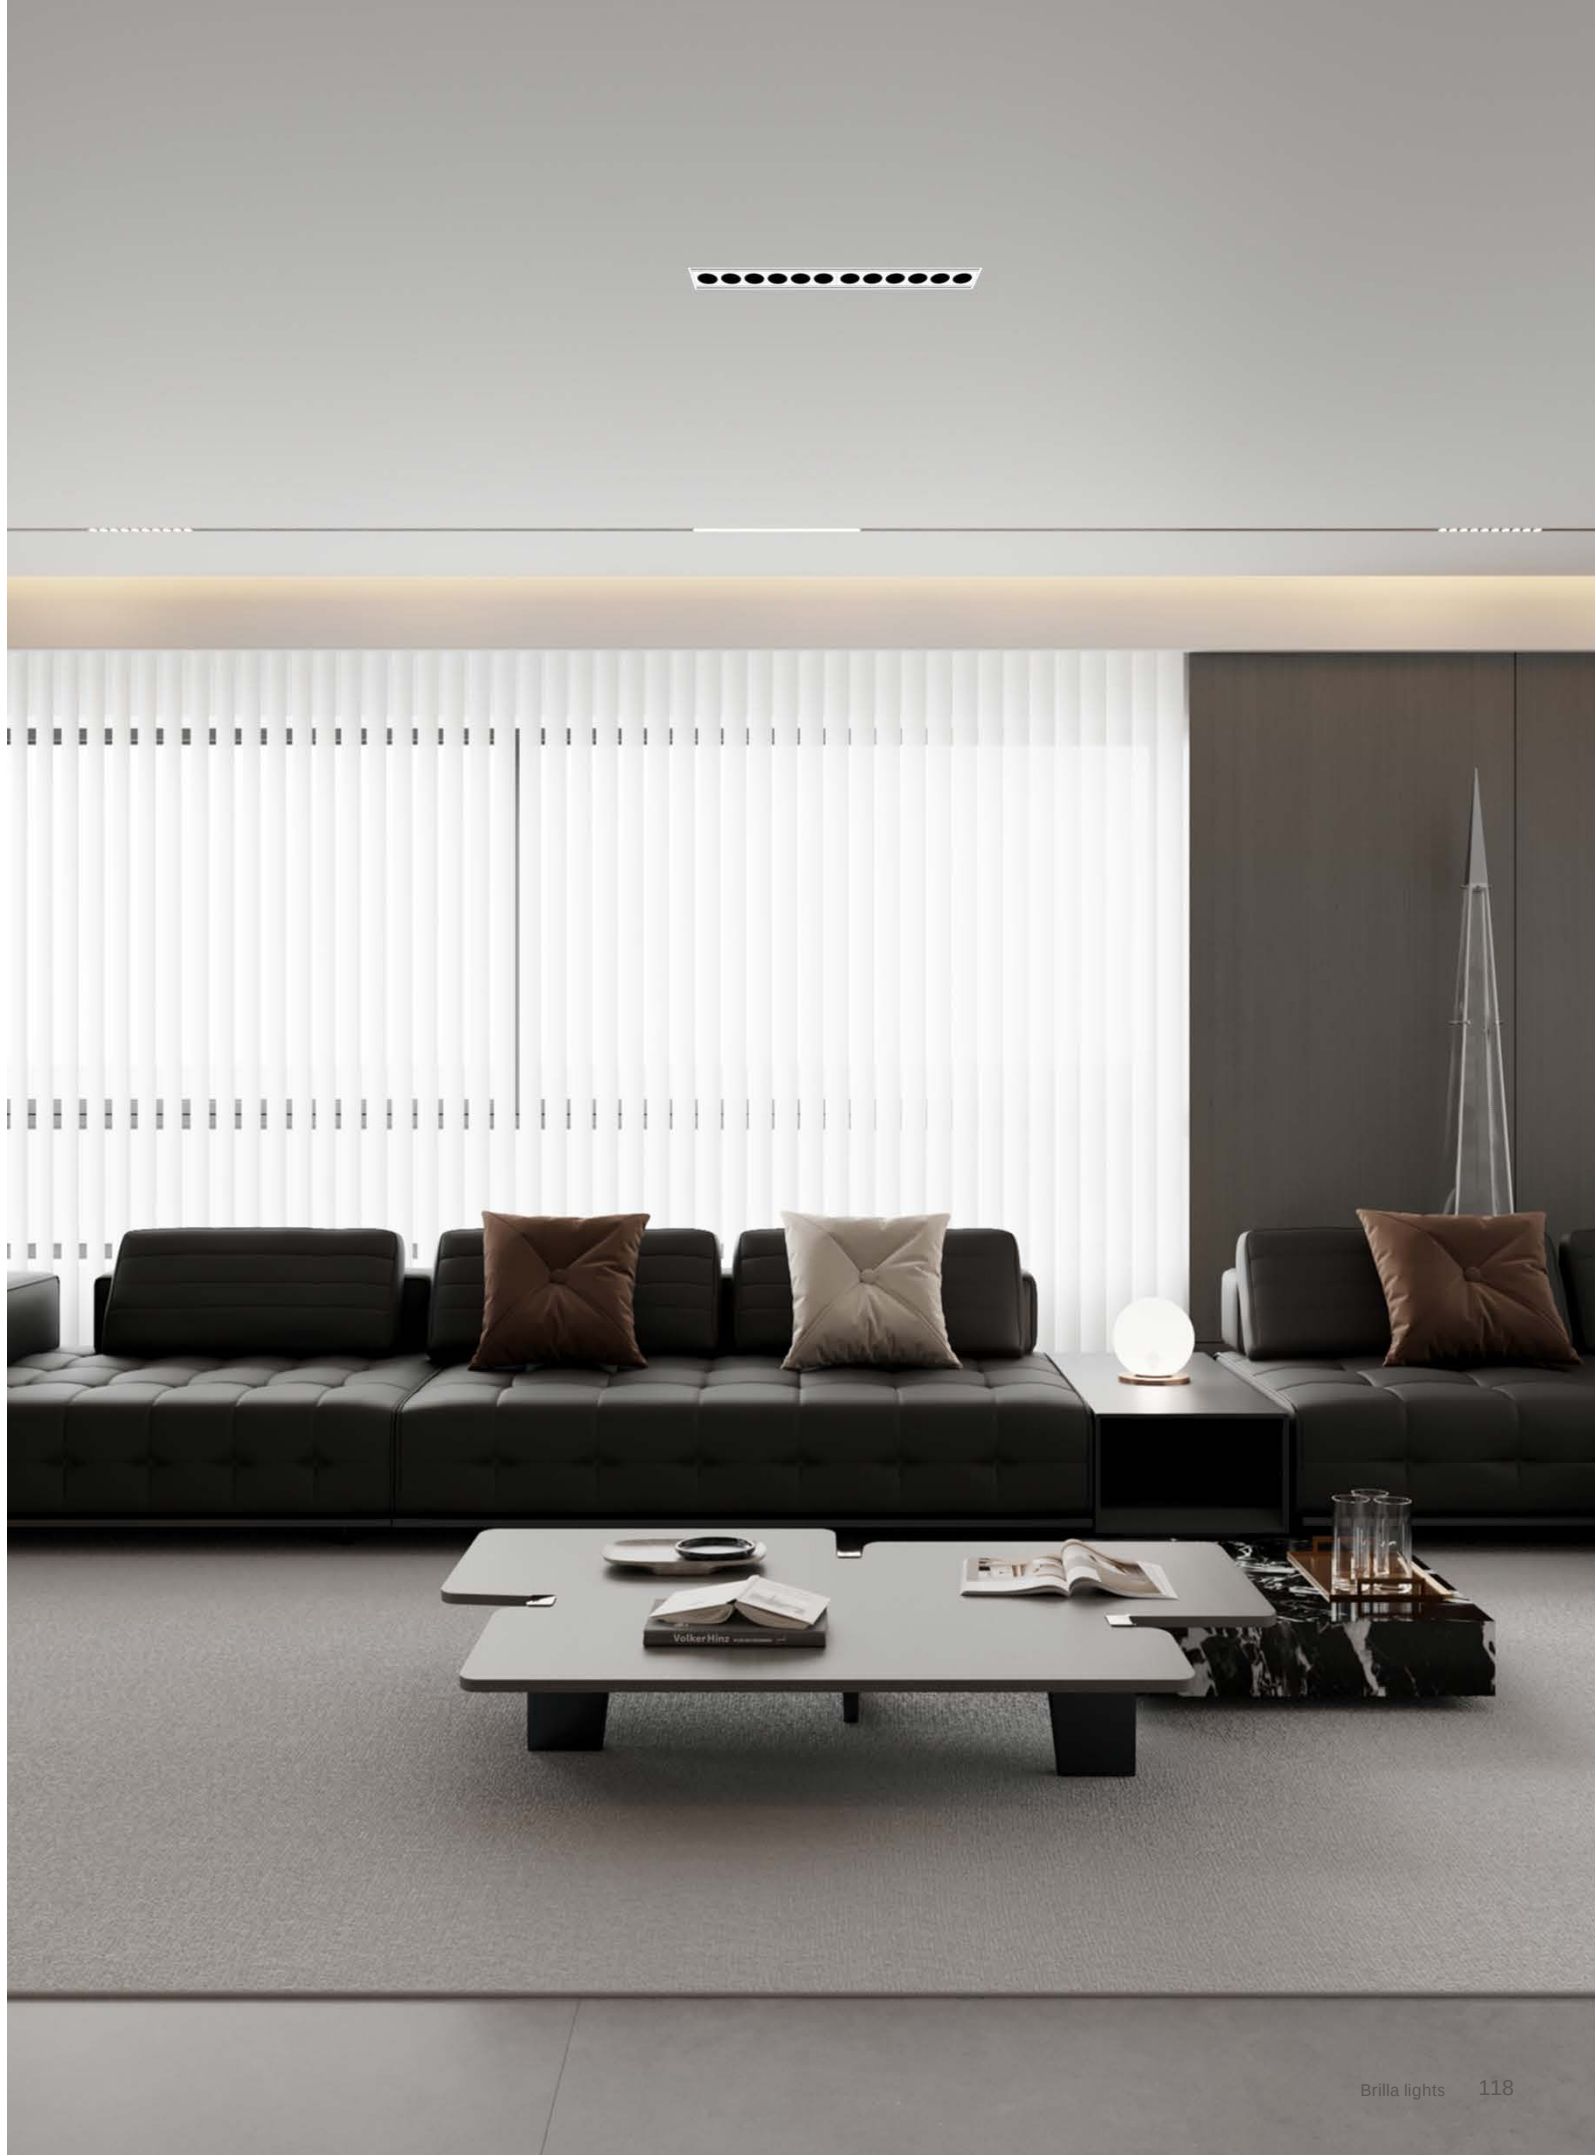

PHANTOM

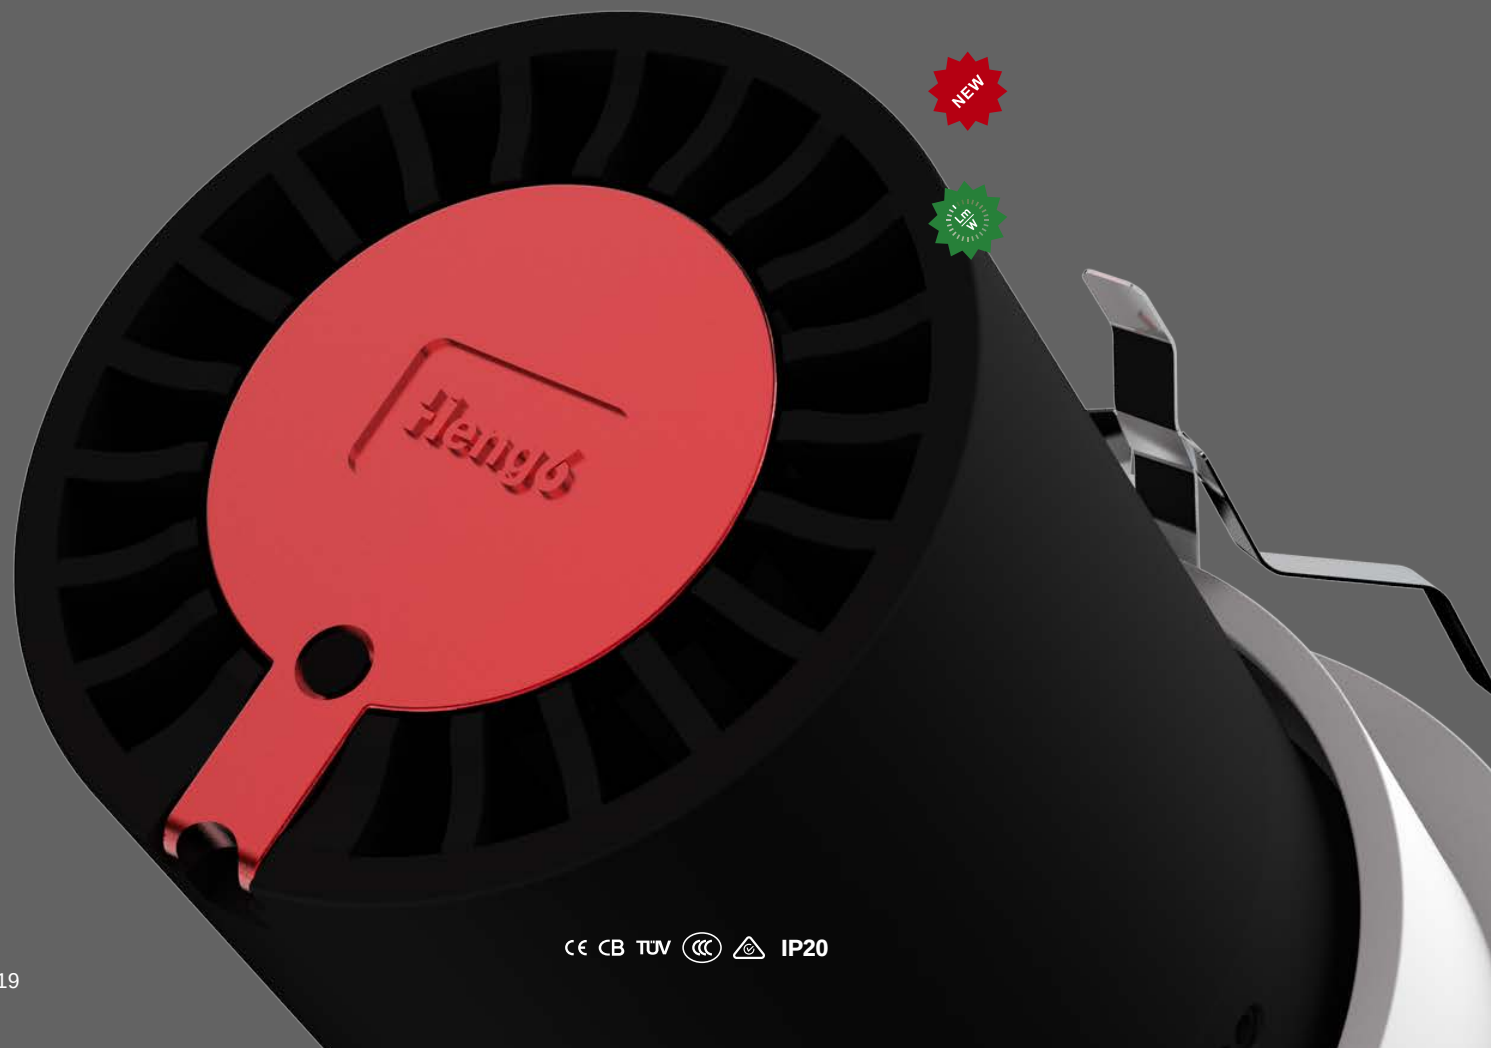

CE CB TÜV IP20

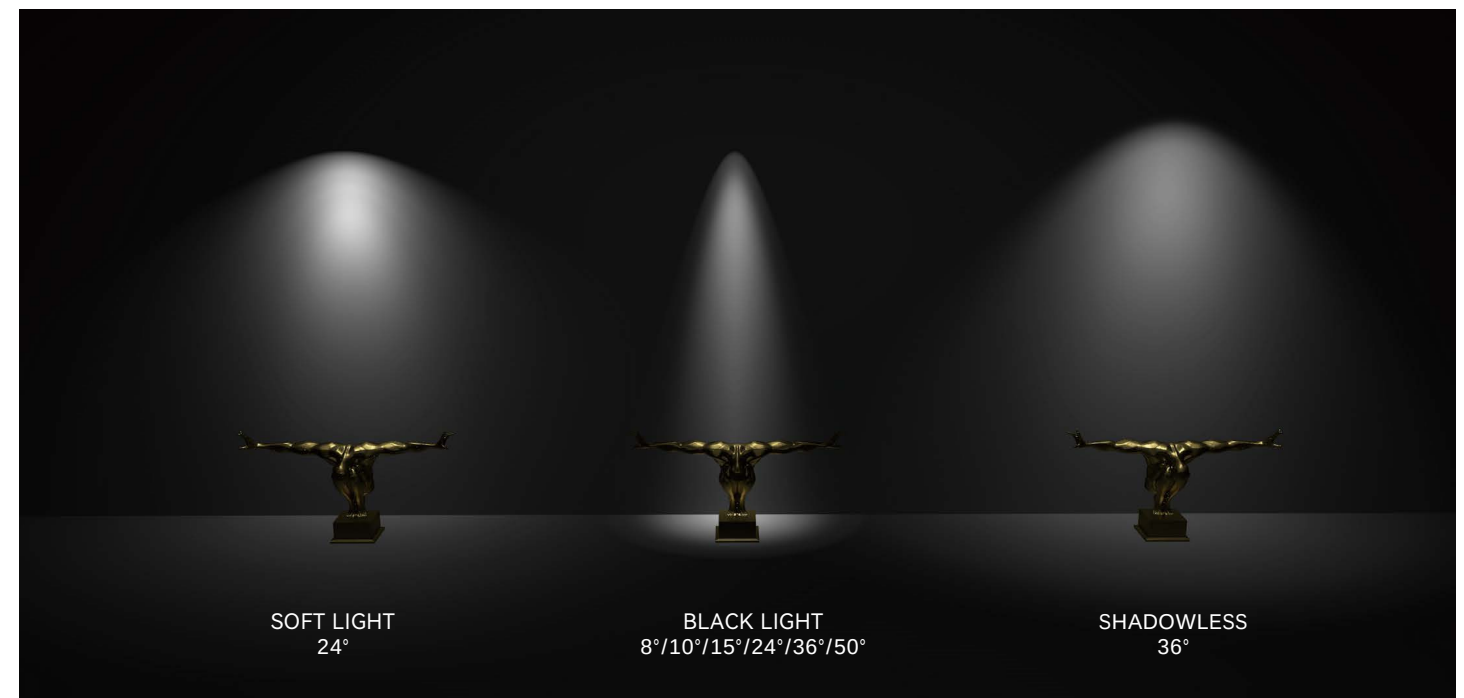


SOFT LIGHT:
1: clear spot line.
2: two-color mixed light spot perfect.

BLACK LIGHT:
1: Light Angle is complete.
2: Accurate luminous Angle.
3: High luminous flux.

SHADOWLESS:
1: no recovery spot.
2: Soft light and shadow,
best for illuminating murals.

PHANTOM S RO



MODEL: SP901-R
SP901-R/SR (S-River)
SYSTEM POWER: 7W/10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 663.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø63*h82mm
CUT OUT: Ø55mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management



Excellent
uniformity


PHANTOM S RO T



MODEL: SP902-T
SP902-T/SR (S-River)
SYSTEM POWER: 7W/10W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 663.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø93*h82mm
CUT OUT: Ø55mm



PHANTOM M RO



MODEL: SP903-R
SP903-R/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 10°/15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1145.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø83*h83mm(10W)
Ø83*h95mm(12W)
CUT OUT: Ø75mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management



Excellent
uniformity


PHANTOM M RO T



MODEL: SP904-T
SP904-T/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 10°/15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1145.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø110*h83mm(10W)
Ø110*h95mm(12W)
CUT OUT: Ø75mm



PHANTOM L RO



MODEL: SP912-R
SP912-R/SR (S-River)
SYSTEM POWER: 24W
ANGLE: 8°/10°/15°/24°/36°/50°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1907Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø110*h118mm
CUT OUT: Ø95mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management




Excellent
uniformity

PHANTOM M SQ1



MODEL: SPQ906-R
SPQ906-R/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 10°/15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1145.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 83*83*h82mm(10W)
83*83*h95mm(12W)
CUT OUT: 76*76mm



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management




Excellent
uniformity


PHANTOM M SQ1 T




MODEL: SPQ905-T
SPQ905-T/SR (S-River)
SYSTEM POWER: 10W/12W
ANGLE: 10°/15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1145.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 105*105*h82mm(10W)
105*105*h95mm(12W)
CUT OUT: 76*76mm




PHANTOM M SQ2





MODEL: SPQ907-R
SPQ907-R/SR (S-River)
SYSTEM POWER: 10W/12W*2
ANGLE: 10°/15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 2290Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 158*83*h82mm(10W)
158*83*h95mm(12W)
CUT OUT: 150*76mm



PHANTOM M SQ3



MODEL: SPQ908-R
SPQ908-R/SR (S-River)
SYSTEM POWER: 10W/12W*3
ANGLE: 10°/15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 3436.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 233*83*h82mm(10W)
233*83*h95mm(12W)
CUT OUT: 225*76mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



SHANGRILA Pro



WHITE BLACK GUN CHROME
BLACK

CE CB TÜV CCC IP20


SHANGRILA PRO S



MODEL: HL-XGL-PRO55
HL-XGL-PRO55/SR (S-River)
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 667Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø65mm*h70mm
CUT OUT: Ø55mm



Ø55mm



SHANGRILA PRO S T



MODEL: HL-XGL-PRO55YM
HL-XGL-PRO55YM/SR (S-River)
SP918-T/SR
SYSTEM POWER: 7W
ANGLE: 15°/24°/36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 667Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø74mm*h70mm
CUT OUT: Ø55mm



Ø55mm


SHANGRILA PRO M



MODEL: HL-XGL-PRO75
HL-XGL-PRO75/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 951.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø85*h80mm
CUT OUT: Ø75mm



Ø75mm



SHANGRILA PRO M T



MODEL: HL-XGL-PRO75YM
HL-XGL-PRO75YM/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 951.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø99mm*h80mm
CUT OUT: Ø75mm



Ø75mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort

SHANGRILA PRO M+



MODEL: HL-XGL-PRO75G
HL-XGL-PRO75G/SR (S-River)
SYSTEM POWER: 15W
ANGLE: 15°/24°/36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1427.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø85*h95mm
CUT OUT: Ø75mm



SHANGRILA PRO M+ T



MODEL: HL-XGL-PRO75YMG
HL-XGL-PRO75YMG/SR (S-River)
SYSTEM POWER: 15W
ANGLE: 15°/24°/36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1427.5Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø99*h95mm
CUT OUT: Ø75mm



SHANGRILA PRO L



MODEL: HL-XGL-PRO95
HL-XGL-PRO95/SR (S-River)
SYSTEM POWER: 20W
ANGLE: 15°/24°/36°/55°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1903Lm
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø105*h110mm
CUT OUT: Ø95mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



IP45

RECOMMEND



VISOR


It can withstand multiple protective designs such as water vapor, fog, and oil fume splashes, effectively preventing water vapor from entering and ensuring durability.

CE CB TÜV CCC IP48

VISOR SP



MODEL: HL-FS02
SYSTEM POWER: 12W
ANGLE: 15°/24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
LUMINOUS FLUX: 1022Lm
CRI: Ra≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø85*h99mm
CUT OUT: Ø75mm



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



IPX8

RECOMMEND



VISOR

A waterproof tube light that is very suitable for use in bathrooms, washrooms, and other places. Provides IPX8 waterproof rating and can accept splashes or flushes.

CE CB TÜV CCC IPX8

VISOR 75



MODEL: DL904-R
DL904-R/SR (S-River)
SYSTEM POWER: 10W
ANGLE: 38°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6500K
LUMINOUS FLUX: 842Lm
CRI: Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø90*h90mm
CUT OUT: Ø75mm



Fixed



Certificate mark



IP rating



Different light colours



Excellent thermal management



Excellent visual comfort

STRONG MAGNETIC
ADSORPTION

Super strong magnetic attraction,
permanent magnetism



INDUCTION
MODULE

Human body sensing
/
Photosensitive sensing

IP20

IP48



DAWN

Magnetic series induction foot light

86 boxes of magnetic induction foot lights,
multiple DIY light emitting panels,
super strong magnetic panel, easy to put and suck.
A sensing angle of 120 degrees and an effective
range of 3m for human body sensing.
Highly sensitive sensing function, enabling the lights
to turn on when people come and off when
people leave.

CE CB TUV CCC IP48 36V

DAWN/IP



HL-DJ
WALL INSTRUCTIONS/
Human body+light sensing



DAWN/IP CT
HL-DJ-CT86



DAWN/IP TX
HL-DJ-TX86



DAWN/IP DY
HL-DJ-DY86



DAWN/IP SJ
HL-DJ-SJ86



DAWN/IP JX
HL-DJ-JX86



DAWN/IP SD
HL-DJ-SD86



DAWN/IP XCT
HL-DJ-XCT86



MODEL: WL101-86
SYSTEM POWER: 3W
ANGLE: 90°
CCT: 3000K-6000K
CRI: Ra≥80
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 86*86*h36mm
CUT OUT: 86 bottom box



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort

SUNSET

Induction series linear foot light

86 boxes of magnetic induction foot lights, multiple DIY light emitting panels, super strong magnetic panel, easy to put and suck. A sensing angle of 120 degrees and an effective range of 3m for human body sensing. Highly sensitive sensing function, enabling the lights to turn on when people come and off when people leave.




INDUCTION MODULE

Human body sensing
/
Photosensitive sensing

IP65


SUNSET LI



WL103-R
WALL INSTRUCTIONS
Human body+light sensing



MODEL: WL103-R
SYSTEM POWER: 3W
ANGLE: 10°
CCT: 3000K/4000K/5000K
CRI: Ra≥80
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
INDUCTION TIME: 25-35s
SENSING DISTANCE: 1-3m
SIZE: 185*40*w44mm
CUT OUT: 170*33*w41mm




SUNSET SQ T



WL103-T
WALL INSTRUCTIONS/TRIMLESS
Human body+light sensing



MODEL: WL103-T
SYSTEM POWER: 3W
ANGLE: 10°
CCT: 3000K/4000K/5000K
CRI: Ra≥80
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
INDUCTION TIME: 25-35s
SENSING DISTANCE: 1-3m
SIZE: 200*90*w45mm
CUT OUT: 170*40*w45mm



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



TOUCH

The TOUCH series artistic atmosphere lights are inspired by the lighting relationship between the ceiling and the ground, A simple appearance can bring a sense of luxury and unique personality to the space.

design

CE CB TÜV IP20



TOUCH

MODEL: HL-GT80
SYSTEM POWER: 10W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø80*h380mm
Adjust 1500-2300mm
CUT OUT: /

Finish

BLACK GUN BLACK GOLD

Control

ON/OFF S · RIVER



REFLECTION

The sunset like radiance, with neat and clear edges of the light spots,
Enhance the spatial hierarchy and artistic conception.

CE CB TÜV CCC IP20



REFLECTION

MODEL: HL-YSH95
SYSTEM POWER: 7W
ANGLE: 60°
CCT: 2700K-6000K
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø95*h580mm
Adjust1500-2300mm
CUT OUT: /

Finish

RED GOLD WHITE

Control

ON/OFF S · RIVER




DYCE

Advanced industrial appearance design,
with soft and anti glare light that is
not glaring.

CE CB TÜV   IP20

design

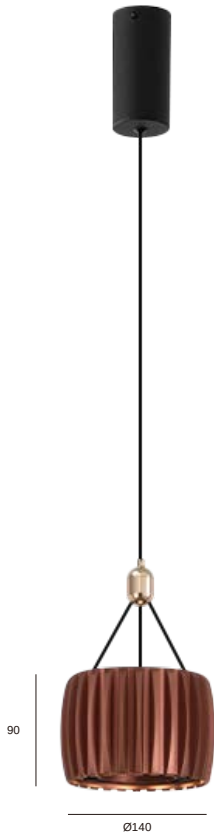


DYCE S

MODEL: HL-XL90
SYSTEM POWER: 16W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø140*h90mm
Adjust 500-1200mm
CUT OUT: /

Finish
● BROWN ● GOLD ● BLUE

Control
ON/OFF | S · RIVER

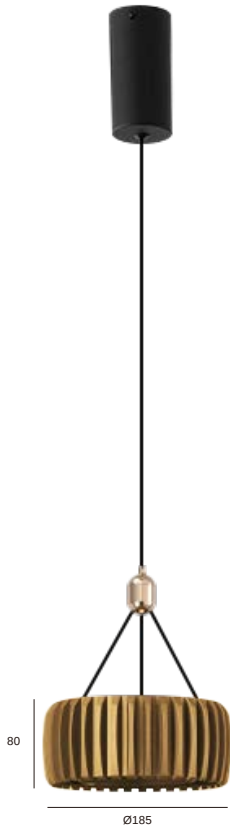


DYCE M

MODEL: HL-XL80
SYSTEM POWER: 20W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø185*h80mm
Adjust 500-1200mm
CUT OUT: /

Finish
● BROWN ● GOLD ● BLUE

Control
ON/OFF | S · RIVER

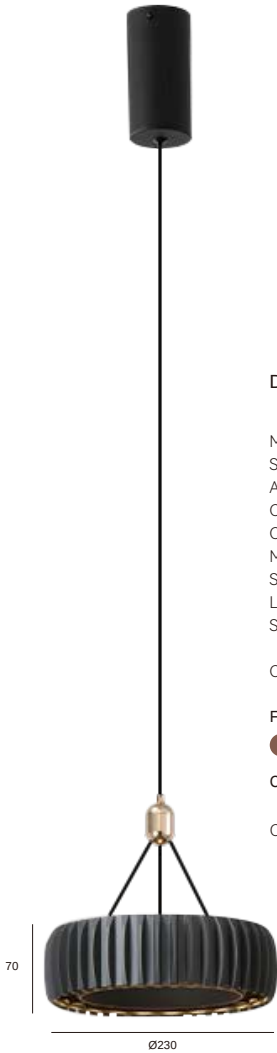

DYCE L

MODEL: HL-XL70
SYSTEM POWER: 25W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: Ø230*h70mm
Adjust500-1200mm
CUT OUT: /

Finish
● BROWN ● GOLD ● BLUE

Control
ON/OFF | S · RIVER



HERON

Wanxiang's adjustable angle art wall wash spotlight series provides unparalleled visual enjoyment.

CE CB TÜV CCC IP20

HERON



MODEL: HL-CL210
SYSTEM POWER: 5W
ANGLE: 75°
CCT: 3000K-6000K
CRI: Ra≥97
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux
SIZE: 100*40*210mm
CUT OUT: /



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort

-16.5mm-
NEW

Mini magnetic track system

Magnetic grille light

Magnetic floodlight

Magnetic mini spotlight

Magnetic folding grille light

FUTURE


A masterpiece created by the extremely narrow track system.

Multi combination module products can be installed with different shaped lamps on the same track, which has functional practicality and visual effects.


Made of aviation aluminum, lighter and stronger;
The first silver plated design on copper sheets enhances conductivity and is durable and not easily faded.




HL-LHGD407
SPOTLIGHT

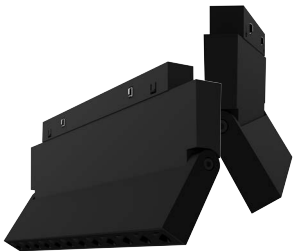



HL-LH6DZD / HL-LH12DZD
FOLDING GRILLE LIGHT

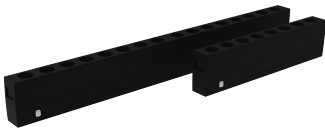


HL-LH8DGS / HL-LH16DGS
GRILLE LIGHT

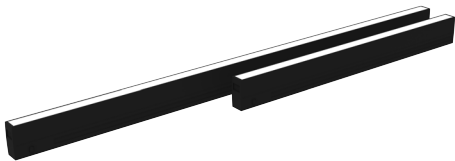

HL-LH300FG / HL-LH600FG
FLOODLIGHT




FUTURE



MODEL: HL-LHGD407
SYSTEM POWER: 12W
ANGLE: 24°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
CRI: SINGLE COLOR Ra≥98, TWO COLORRa≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux

3 installation methods

Without unnecessary trouble, a single track can complete the ceiling surface installation
or embedded or concealed installation requirements such
as ash batch/sealing plate/bamboo fiber board.

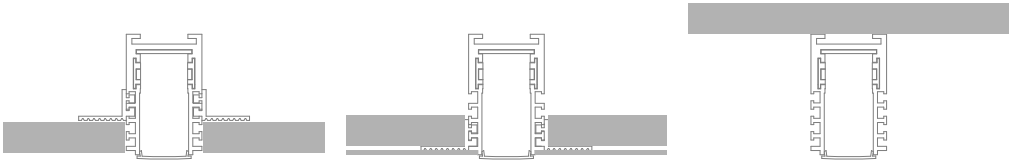

EMBEDDED

CONCEALED

SURFACE



Adjustable



Certificate
mark



IP rating



Different light
colours




Excellent
thermal
management




Excellent
visual comfort

FUTURE




MODEL: HL-LH12DZD
SYSTEM POWER: 6w
ANGLE: 24°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
CRI: SINGLE COLOR Ra≥98,
TWO COLORRa≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux

FUTURE

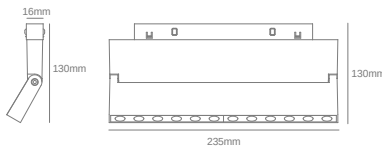


MODEL: HL-LH12DZD
SYSTEM POWER: 12W
ANGLE: 24°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
CRI: SINGLE COLOR Ra≥98,
TWO COLORRa≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux

FUTURE



MODEL: HL-LH8DGS
SYSTEM POWER: 8W
ANGLE: 24°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
CRI: SINGLE COLOR Ra≥98,
TWO COLORRa≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux

FUTURE

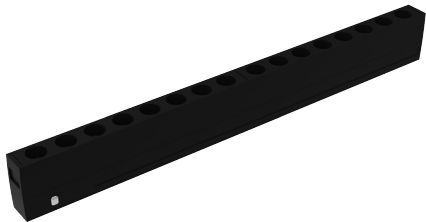

MODEL: HL-LH16DGS
SYSTEM POWER: 16W
ANGLE: 24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
CRI: SINGLE COLOR Ra≥98,
TWO COLORRa≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



Fixed



Certificate
mark



IP rating



Different light
colours





Excellent
thermal
management




Excellent
visual comfort

FUTURE

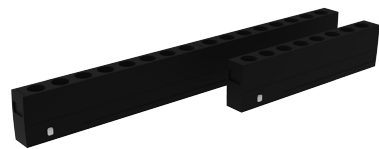

MODEL: HL-LH300FG
SYSTEM POWER: 20W
ANGLE: 120°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
CRI: SINGLE COLOR Ra≥98,
TWO COLORRa≥92
CRI: Ra≥98
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux

FUTURE

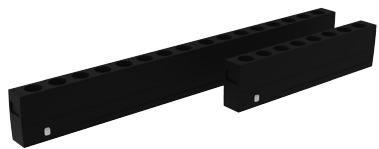

MODEL: HL-LH600FG
SYSTEM POWER: 40W
ANGLE: 24°/36°
CCT: SINGLE COLOR 3000K,3500K,4000K,5700K
TWO COLOR 2700-6000K
CRI: SINGLE COLOR Ra≥98,
TWO COLORRa≥92
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort



SPIRITUAL



design

CE CB TUV CCC IP20



SPIRITUAL FIREFLY



FIREFLY



MODEL: HL-LT-GS
SYSTEM POWER: 8W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management




Excellent
visual comfort

SPIRITUAL WING



WING



MODEL: HL-LT-GSY
SYSTEM POWER: 8W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management




Excellent
visual comfort

SPIRITUAL TRACING



TRACING

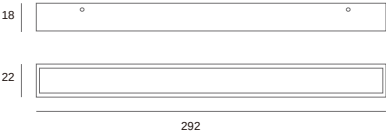

MODEL: HL-LT-FG
SYSTEM POWER: 8W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management




Excellent
visual comfort

SPIRITUAL DAYLIGHT



DAYLIGHT



MODEL: HL-LT-DX
SYSTEM POWER: 8W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux



Fixed



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management




Excellent
visual comfort



SPIRITUAL RISING

RISING



MODEL: HL-LT-GD
SYSTEM POWER: 8W
ANGLE: 15°/24°/36°
CCT: 2700K-6000K
CRI: Ra≥90
MOT: -25°~50°
SERVICE LIFE: 35000-50000h
LED: bridgelux



Adjustable



Certificate
mark



IP rating



Different light
colours



Excellent
thermal
management



Excellent
visual comfort

Conventional
concealed track
Height: 22mm

Ceiling surface
Height: 22mm

ULTRA THIN THICKNESS
Only 9mm

Ceiling mounted
magnetic suction
Height: 9mm

iPhone 12
Thickness: 7.4mm

INTELLIGENT SYSTEM

EASY TO INSTALL.

No network, gateway or any new cabling required.
Just set up the lighting and pair it with your smartphone or tablet.
No additional configuration is required.

EASY TO USE.

You can control the lighting through an intuitive user interface on your smartphone or tablet.

EASY TO ENJOY.

With just a tap of your smartphone, you can set the atmosphere.
With the S-RIVER application, you can control the luminaires individually or in groups.

12' Large screen



WIRELESS
REGULATION
Bluetooth

Intelligent central control

12 INCH TOUCH SCREEN

Intelligent central control screen customized for lighting environments and smart scenes
Android 11 supports wired connections, voice control, app manipulation, and more,
Standard Double 86 Bottom Box Installation

HL-SR12C-S86



10 INCH TOUCH SCREEN

Support APK software installation, support Bluetooth local control,
WIFI network control, and synchronize all control content of APP accounts.
Support background music,
installation: fixed to 86 bottom box

HL-YJ10C



TOUCH SCREEN (Offline version)

Bluetooth direct connection, supports single device, group, and scene control without network connection, supports on/off, dimming and color adjustment, and scene triggered control content.

Installation: Fixed to the bottom box of 86

HL-ZK4C



UNIVERSAL INFRARED REPEATER

Universal infrared sensor, connected to air conditioning, television, set-top box devices,

Implement switch, control, and scene linkage.

Input: USB 5V, infrared distance from device: ≤ 8 meters

Support relay devices: lighting fixtures, curtains, sockets, switches.

HL-SR80-WNHW



SIGNAL AMPLIFIER REPEATER - WIRED VERSION

Signal repeater, cable long distance to achieve enhanced transmission of networking capabilities between devices,

Help increase signal between devices, plug and play.

Input: USB 5V, signal relay distance: 0-500 meters

Standby power consumption: 0.5W,

Support relay devices: lighting fixtures, curtains, sockets, switches.

HL-SR-DSPA



SENSOR PIR HUMAN BODY SENSING

By sensing people, the linkage of devices is executed when people move,
Or the triggering action of the scene.
Input: CR123A battery 3V.

Switch, dimming, scene mode trigger,
Linkage devices: lighting fixtures, curtains,
switches, sockets.

HL-CG



HUMAN BODY PRESENCE SENSOR

By sensing the conditions of human existence, triggering linkage, scenes.
Input: AC220-240V, ceiling

CUT OUT: Ø 55mm

Control content: switch, dimming, scene mode triggering,
Linkage devices: lighting fixtures, curtains, switches, sockets

HL-SR80-RTCZ-24CZ



DOOR MAGNETIC SENSOR

Intelligent door and window magnetic sensor
door magnetic detector

HL-MC



SIGNAL AMPLIFIER REPEATER – WIRELESS VERSION

No additional separate wiring is required.
Connect the VRF central air conditioning controller to
any internal unit port to complete the installation
(some brands of MODEL require connection to an
external unit)

HL-S·R-VRF



ELECTRIC CURTAIN TRACK

Curtains can be controlled through a mobile app and
voice controlled.
Support remote control or passive switch control.
You can set the scene mode to be linked with other
smart home products and device
scene modes

HL-SR-CLGD



8 BUTTONS, FREELY PASTE -4 SETS OF DIMMING AND COLOR ADJUSTMENT

Wireless dimming panel, supports 4 sets of device content customization, supports on/off/dimming/color adjustment.

Input: Type-C rechargeable battery, supports control of single device, group, and scene.

Installation: Freely stick and fix

HL-SR-YKQ



8 BUTTONS CAN BE FREELY PASTED -8 SCENES

Wireless scene panel, supporting 8 buttons to control content customization.

Input: Type-C rechargeable battery, supports control for single device, **group, and scene,**

and supports control content for switch and scene switching.


Installation: Adhesive fixation

HL-SR-CLGD



INTELLIGENT SWITCH ON/OFF CONTROLLER

HL-KGHZ-1

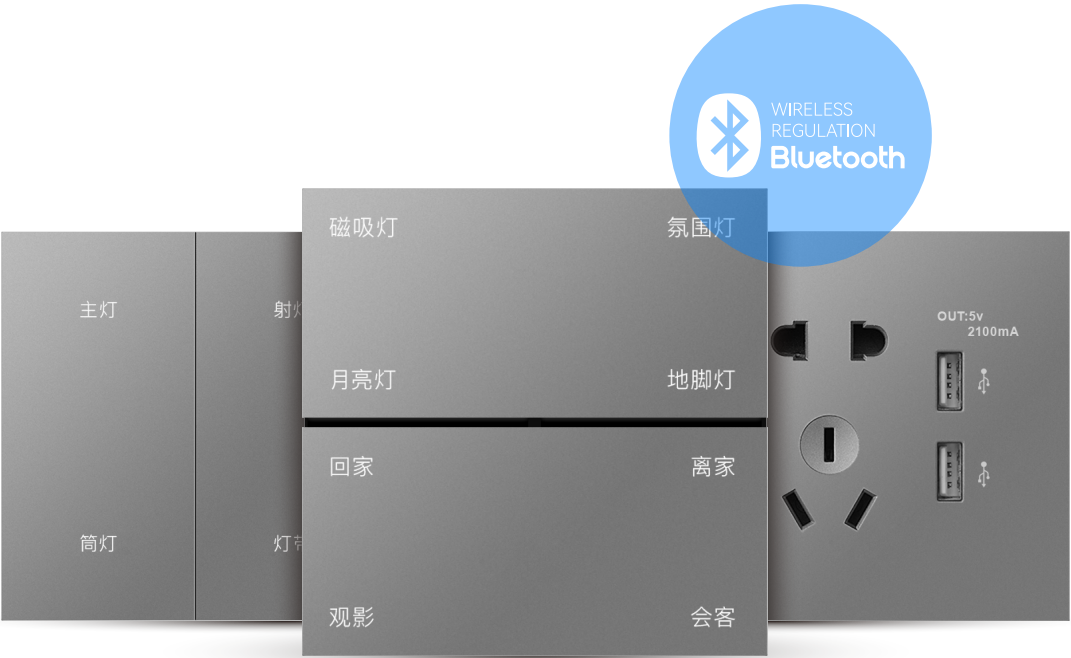

Advanced Grey

M6 INTELLIGENT COMPOSITE SWITCH

Classic and durable

The large panel buttons have a perfect tactile sensation,
embodying an intelligent new style.

HL-M6




M6/Smart One Button
HL-M6-1K

M6/Smart Two Button
HL-M6-2K

M6/Smart Three Button
HL-M6-3K


M6/Smart Four Button
HL-M6-4K



M6
Intelligent four button+4 scene
HL-M6-4K+4J



M6/Five hole socket
HL-M6-5K



M6
Five hole+USB socket
HL-M6-5K+USB



M6/16A Socket
HL-M6-16A




M6/Internet Socket Outlet
HL-M6-WN

Series Name: M6 Intelligent composite switch(Project Style)
Product Appearance: Grey
Power supply mode: Neutral live wire
Product Size: Standard 86 * 86 bottom box
Input voltage: AC 85V~265V
Load range: LED load ≤ 300W
Working temperature: -10 °C~50 °C
Working humidity: ≤ 92% RH
Communication frequency: 2.4GHz, IEEE 802.15.4
Transmission distance: 30m (open environment)

LED LIGHT STRIP

Heng6 LED lights produce uniform light, effectively enhancing the sense of spatial hierarchy. Selecting high-quality and high CRI light sources, comparable to natural light, to restore true colors.

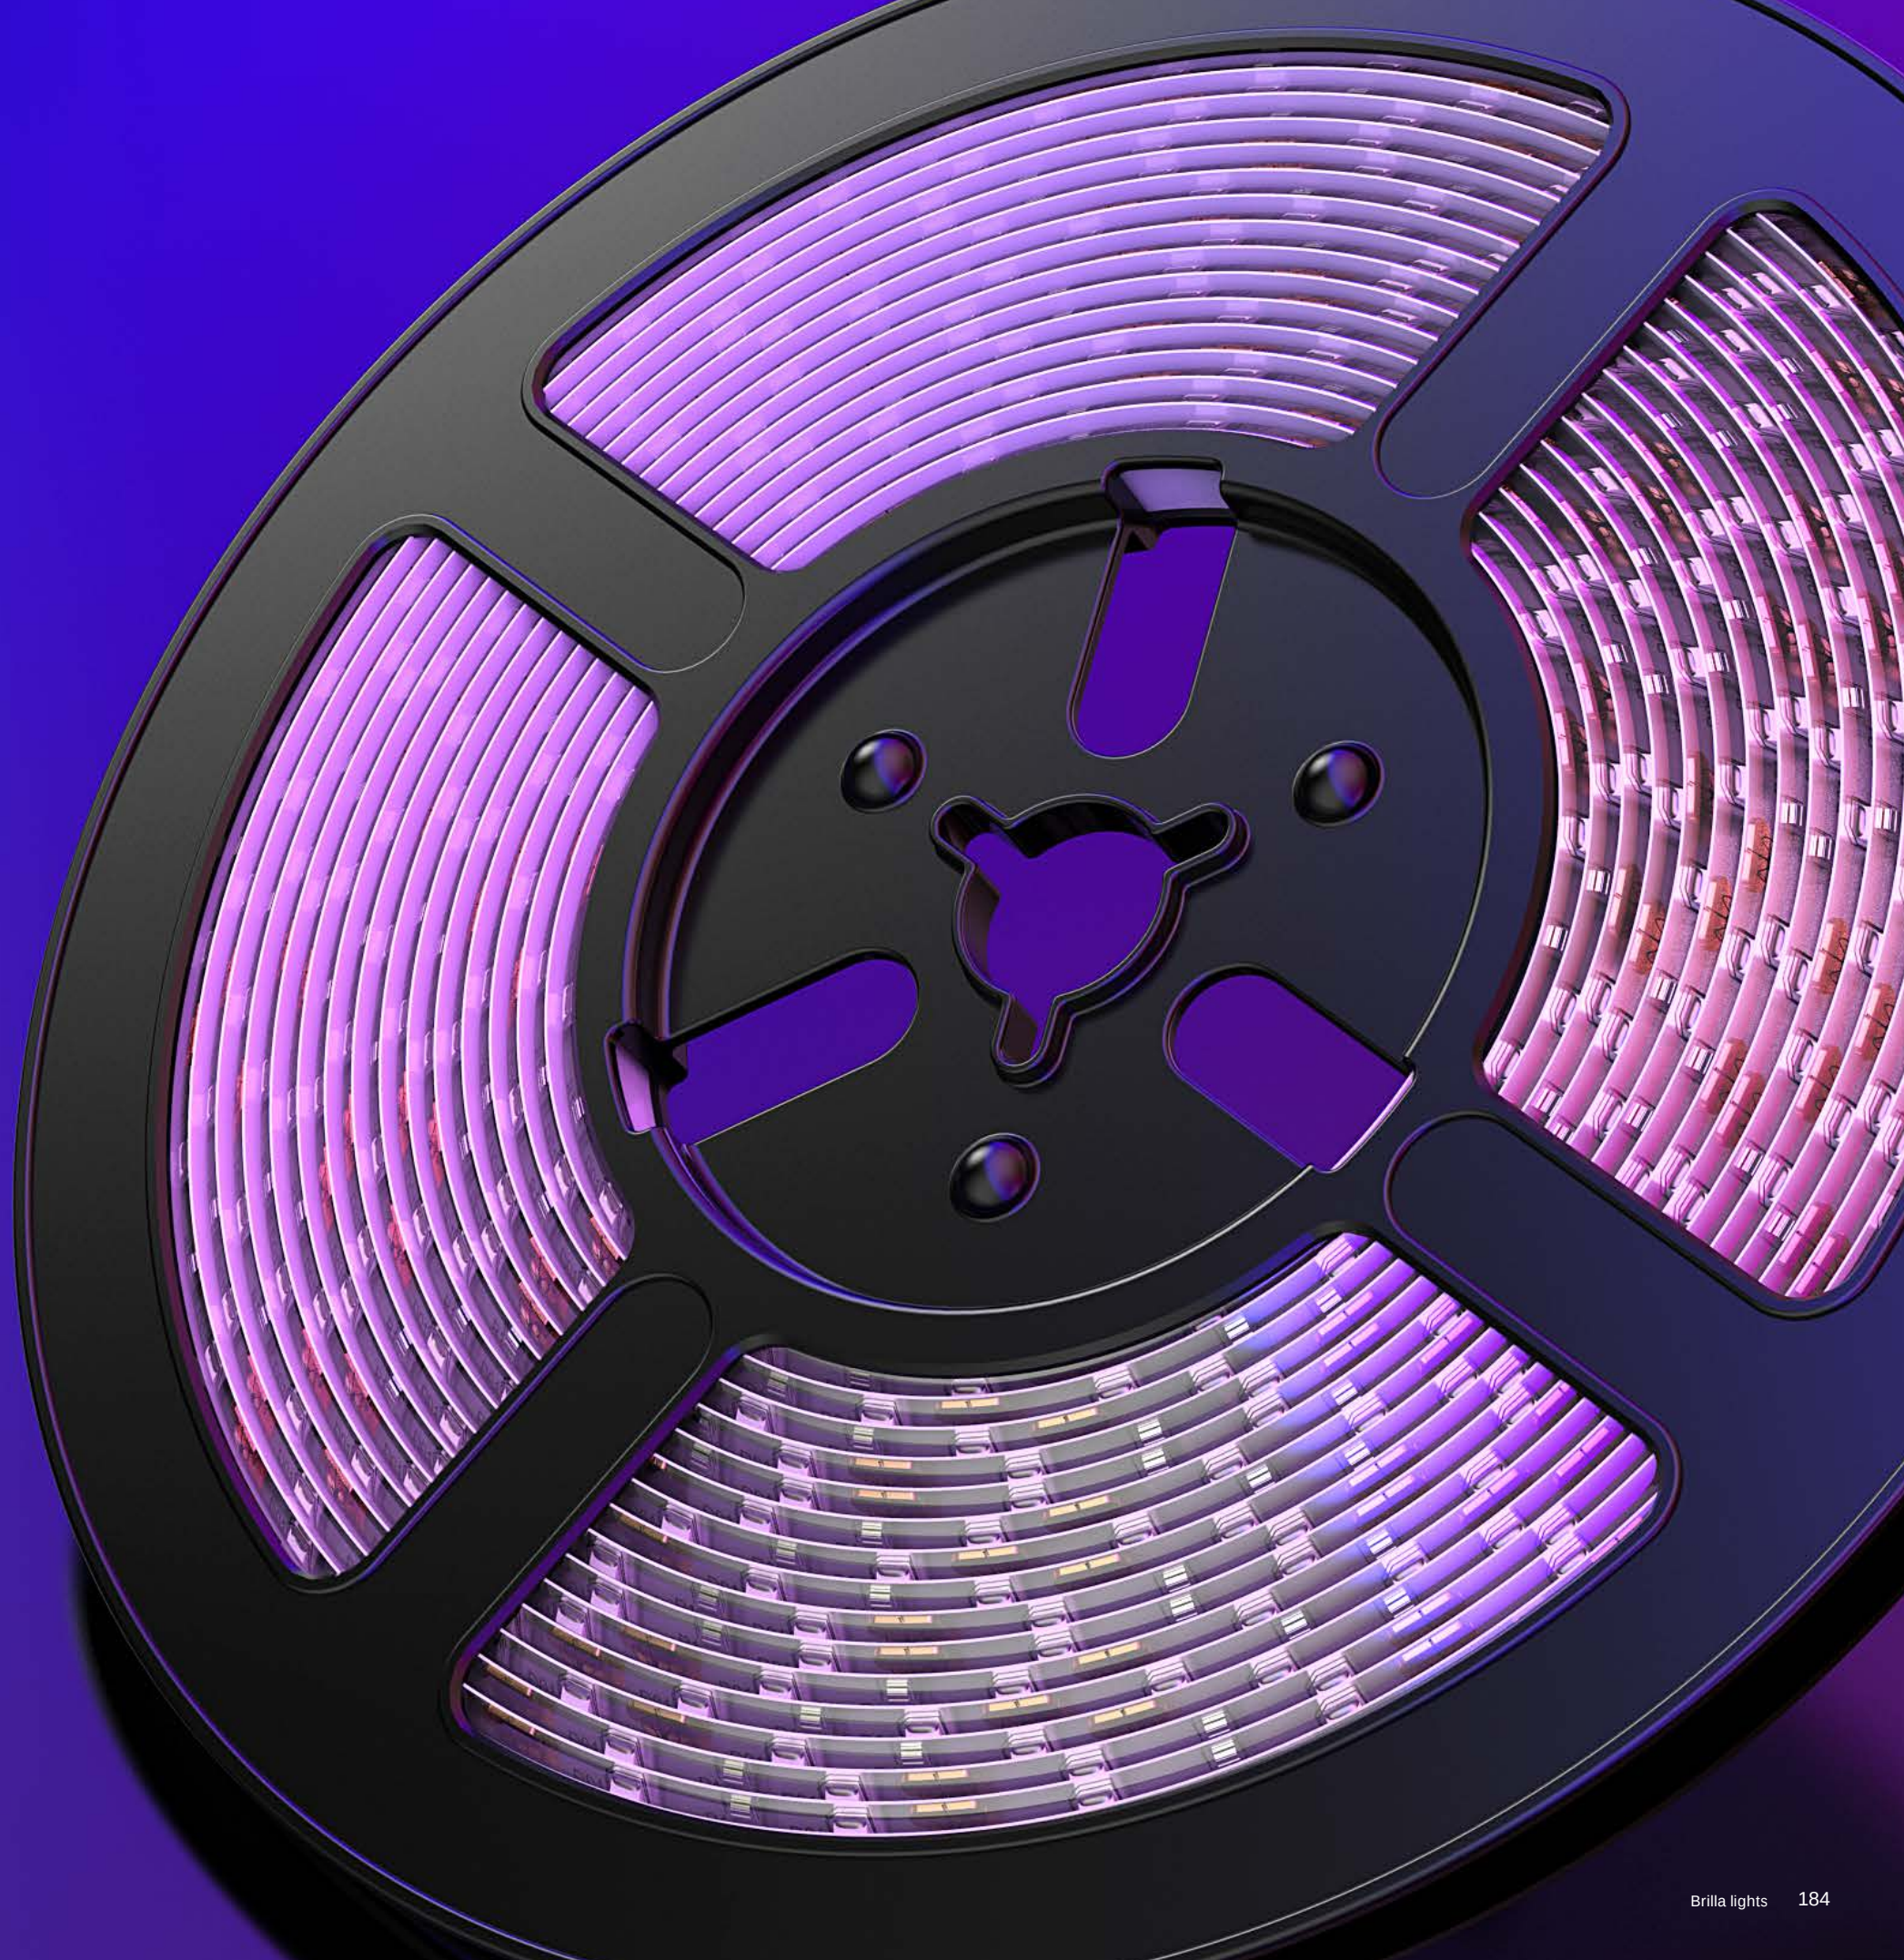


SCENARIO ANALYSIS

With the rapid development of the LED industry, high-efficiency linear lighting products have fully met the needs of main lighting, and emit light uniformly and enhance the environment, strengthening visual senses.


The high luminous efficiency of LED linear lighting also saves costs.

LED linear lighting has a longer lifespan compared to other types of lamps, saving maintenance and replacement costs.


It can have a lifespan of 5 to 10 years and significantly reduce energy costs.

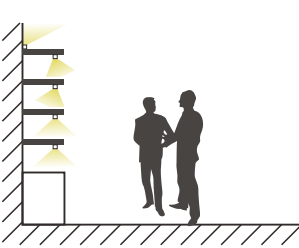


LIGHTING ON
SHELVES

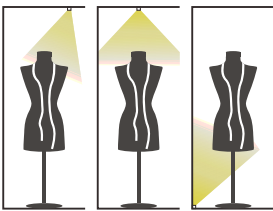


WINDOW DISPLAY
LIGHTING




EXHIBITION
LIGHTING




BENCH LIGHTING



EXHIBITION HALL
LIGHTING




STAIRCASE
LIGHTING




WALL LIGHTING BEHIND
PARTITIONS




TOP LIGHTING OF
DISPLAY CABINETS




LIGHTING AT THE BOTTOM OF
THE DISPLAY CABINET



REFLECTION
ILLUMINATION




HIDE LIGHTING




LIGHTING FOR CURVED
WALLS

WIRING APPLICATION


SINGLE COLOR LIGHT STRIP WIRING




DUAL COLOR TEMPERATURE LIGHT STRIP WIRING

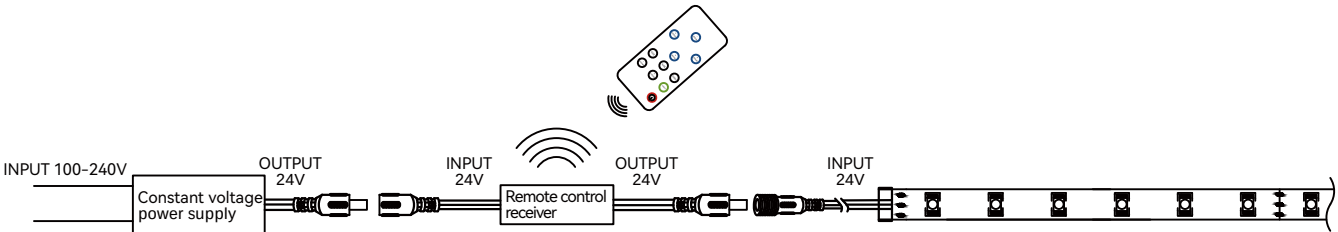

RGB STRIP WIRING DIAGRAM

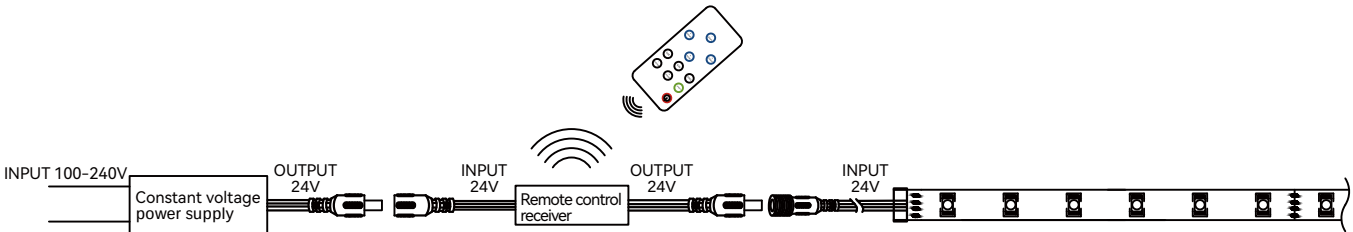

COLORFUL LIGHT STRIP WIRING

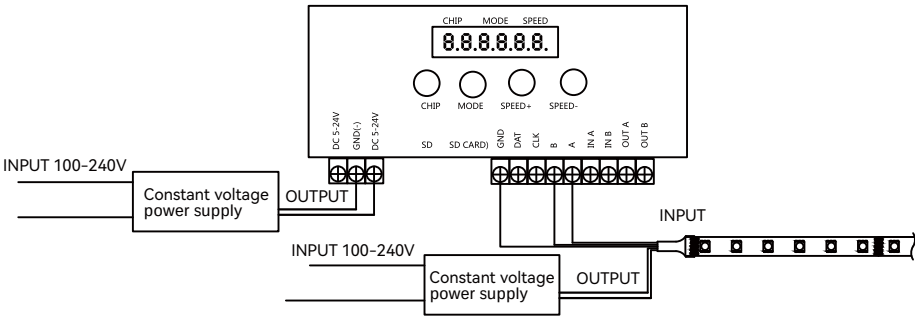



24V TWO-WIRE DIMMING LIGHT STRIP

MODEL: HL-CLC-120D8MM
CONTROL: S-River
SYSTEM POWER: 12W/m
CRI: Ra≥90
OUTPUT VOLTAGE: 24V
CCT: 1600-25000K



24V THREE WIRE DUAL COLOR LOW-VOLTAGE LIGHT STRIP

MODEL: HL-SS2835-198D
CONTROL: S-River
SYSTEM POWER: 18W/m
CRI: Ra≥92
OUTPUT VOLTAGE: 24V
CCT: 2700-6500K



24V COB-RGB+CW LIGHT STRIP

MODEL: COB-840DRGB+CW 12mm
CONTROL: S-River
SYSTEM POWER: 12W/m
CRI: Ra≥90
OUTPUT VOLTAGE: 24V
CCT: RGB+TWO COLOR (5 in 1)



24VCOB SOFT LIGHT STRIP WITH RGB RACING RAINBOW

MODEL: HL-CLC-COB-720D-RGB 12mm
CONTROL: S-River
SYSTEM POWER: 18W/m
CRI: Ra≥90
OUTPUT VOLTAGE: 24V
CCT: RGB-circulate

Must be matched with a dedicated 3-wire iridescent controller to use